



U.S. Department of Transportation

National Highway Traffic Safety Administration

#### Dear Crash Data Researchers/Users:

Thank you for choosing crash data from the National Highway Traffic Safety Administration (NHTSA) for your research or other use. The information contained in this motor vehicle crash report is collected, maintained and distributed in accordance with Public Law 89-564. In accordance with this Public Law, NHTSA is required not to release any case information until completion of quality control procedures. These procedures include a review of the case material to extract all names, licenses and registration numbers, non-coded interview material, non-research related researcher comments in the margins, non-factual data, and the production number portion of the vehicle identification number (VIN).

If you requested NHTSA to query its database files in order to identify a specific crash, then that query was made using non-personal descriptors you provided for use in our search. This motor vehicle crash may have been identified from a data search and matches the general, non-personal descriptors you provided, but we cannot confirm that this is the specific crash report you requested.

If you have any questions with regard to the above procedures, please contact the Field Operations Branch, Crash Investigation Division, National Center for Statistics and Analysis at 202-366-4820. Again, please be advised that we cannot confirm that this is the case that you have specifically requested nor can we certify the information to be correct.

\*\*\* \*\*\* \*\*\*



# FRANKLIN RESEARCH CENTER

Division of Arvin/Calspan, New York 14225

# FRC ON-SITE AIR BAG DEPLOYMENT INVESTIGATION

CASE NO. 90-5

FLEET - 1989 DODGE DAYTONA

LOCATION - NJ

ACCIDENT DATE - 1990

Contract No.

# Prepared for:

U.S. Department of Transportation
National Highway Traffic Safety Administration
Washington, D.C. 20590

"This document is disseminated under the sponsorship of the Department of Transportation in the interest of information exchange. The United States Government assumes no responsibility for the contents or use thereof."

# TECHNICAL REPORT STANDARD TITLE PAGE

1. Report No.	2. Government Acco	ession No.	3.	Recipient's Catalog I	No.	
90-5			İ			
4. Title and Subtitle	•.		5.	Report Date		
FRC On-Site Air Bag Deployment Investigation			1	1990		
Fleet - 1989 Dodge Daytona			6.	Performing Organizat	ion Code	
Location - NJ				, , , , , , , , , , , , , , , , , , ,		
7. Author(s)			8.	Performing Organizat	ion Report No.	
Accident Research Section						
9. Performing Organization Name and Address Franklin Research Center			10.	Work Unit No.	2)	
Accident Research Section			11	Contract or Grant N	lo.	
P.O. Box 400		1	NH22-87-C-07			
Buffalo, NY 14225						
12. Sponsoring Agency Name and Address			13. Type of Report and Period Covered			
U.S. Department of Transport	ation		Technical Report			
National Highway Traffic Safety Administra Washington, D.C. 20590		411011		cident Date *	20	
				Sponsoring Agency Code		
15. Supplementary Notes			L			
On-site investigation of an	air bag deplo	yment crash t	hat i	nvolved a 198	39	
Dodge Daytona.		•				
16. Abstract						
This report focuses on a 198	9 Dodge Dayto	na that was i	nvo1v	ed in a front	tal	
sideswipe type impact sequen						
The Daytona sustained a suff	icient longit	udinal decele	ratio	n to deploy 1	the	
vehicle's driver air bag system.						
The belted driver of the Day	tona loaded t	he deployed a	ir ba	g and steerin	ng	
wheel rim to compress the en	ergy absorbin	g steering co	lumn	1.1". She		
sustained facial abrasions from her involvement with the air bag.						
	•					
17. Key Words		18. Distribution St				
Frontal sideswipe		o. Distribution St	ereuseut			
Sufficient longitudinal dece	leration	General F	oublic			
Air bag deployment						
bag adprojmente						
19. Security Classif. (of this report)	20. Security Class	if. (of this page)		21. No. of Pages	22. Price	
Unclassified	Unclassified			60		

Form DOT F 1700.7 (8-69)

# TABLE OF CONTENTS

	Page No.
Summary	1
Accident Schematic	3
Accident Data	4
Ambience	4
Highway	4
Traffic Controls	5
Vehicles	5
Vehicle Damage	6
Air Bag System	7
Vehicle Velocity Estimates	7
Collision Sequence	8
Human Factors/Occupant Data	9
Air Bag Driver Injuries	9
Air Bag Driver Kinematics	10
Selected Prints	11
Slide Index	20
Appendix A: Police Accident Report	22
Appendix B: Air Bag Supplement	25
Appendix C: NASS Vehicle Forms	32
Appendix D: NASS Occupant Forms	5.3

#### FRANKLIN ON-SITE AIR BAG DEPLOYMENT INVESTIGATION

FRC CASE NO. 90-5

FLEET - 1989 DODGE DAYTONA LOCATION - NJ

#### SUMMARY


This crash occurred on a two lane state route on 1990 at 0610 hours. Involved in the crash were the 1989 Dodge Daytona that was equipped with a driver air bag system and a 1983 Toyota Corolla station wagon. The 22-year-old female driver of the Dodge Daytona was en route to work and was traveling in a southerly direction at an estimated speed of 50 mph. She stated that she was looking in her rear view mirror immediately prior to the crash. Her vehicle crossed the centerline of the roadway and sideswiped the Toyota that was traveling in a northerly direction

Both vehicles sustained moderate sideswipe type damage that began on the extreme left corner of the frontal plane and extended down the entire left side (CDCs of 12-FLES-9). The endura bumper facia of the Daytona compressed laterally which allowed the leading edge of the left front fender to contact the Toyota, resulting in 7" of rearward displacement of the fender edge. There was no front bumper reinforcement bar damage; however, the left bumper energy absorbing device compressed .125" and returned to its original position.

The impact induced deceleration was of sufficient magnitude to deploy the Daytona's driver air bag system. The female driver, 59", 121 lbs., stated that she was in a normal driving attitude with her seat adjusted to a forward position and the tilt steering column set below the center adjustment point. She was wearing the active 3-point belt system. Although there was no load-induced damage to the webbing, the latchplate was heavily scratched which indicated routine usage. In response to the 12 o'clock impact force, the driver moved forward and loaded the deployed air bag and the steering column. Her loading force compressed the energy absorbing column 1.6". Shear capsule separation was measured at 1.1" on the left unit and .4" at the right shear bracket. The steering wheel was displaced forward approximately 1" at the left upper quadrant. The driver's contact with the air bag resulted in abrasions (AIS-1) of the underside of the chin and of the left face. Following the crash, the driver was transported to a second where the attending physician diagnosed her facial abrasions as chemical burns.

The investigating police officer noted on his accident report that "the air bag blew up in the driver's face causing her to lose control and cross over into the opposite lane." An inadvertent deployment was ruled out by three factors:

- 1) The driver did not state that the air bag system deployed prior to impact or that it caused the crash.
- 2) There was no damage (i.e., undercarriage) or factors at the scene to support a deployment prior to the sideswipe impact with the Toyota.
- 3) Chrysler's readout of the system's diagnostic unit did not yield any transient faults that would support or cause an inadvertent deployment.

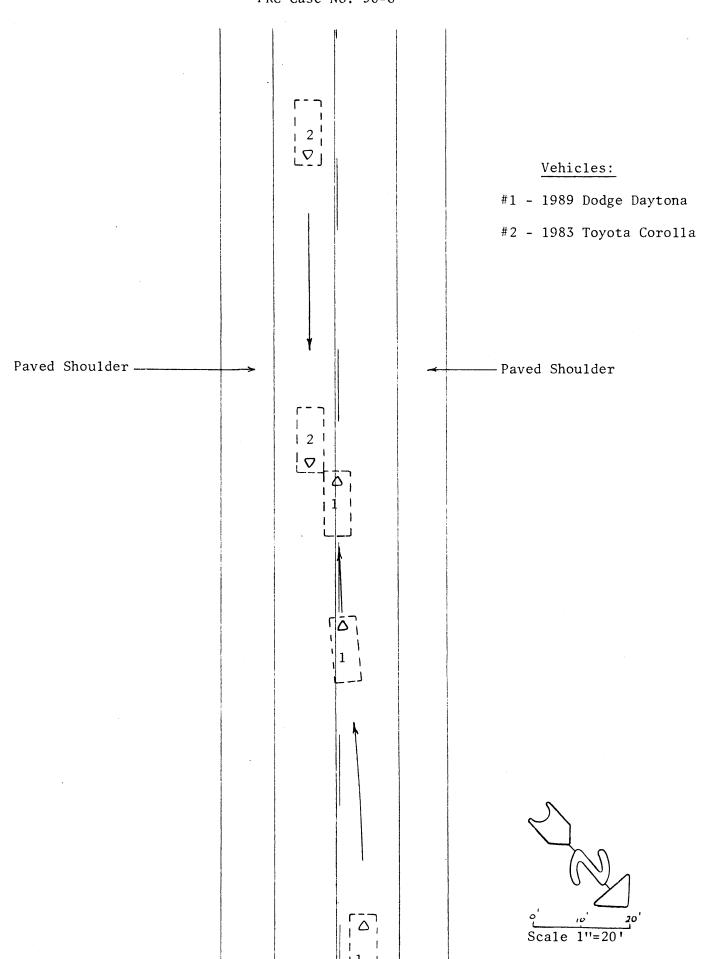

# FRANKLIN ON-SITE AIR BAG DEPLOYMENT INVESTIGATION

FRC CASE NO. 90-5

FLEET - 1989 DODGE DAYTONA LOCATION - NJ

## ACCIDENT DATA

Location:

State route

City/Township:

ŊJ

Area/Type:

Rural/Residential

Accident Date/Time:

1990,



Investigating Police

Agency: ..

Department

Accident Type:

Car/Car, opposite direction sideswipe

Air Bag Vehicle

Occupant Injury Severity:

Minor (AIS-1)

#### AMBIENCE

Viewing Conditions:

Daylight

Weather:

Clear

Precipitation:

None

Road Surface:

Dry

#### HIGHWAY

Type:

State route

Number of Lanes:

2

Width:

25'4"

Surface:

Asphalt

Median:

None

Edge:

East edge - 11' paved shoulder West edge - 10'2" paved shoulder

## HIGHWAY (CONT'D.)

Vertical Alignment: 1.5" grade, negative to the south

Horizontal Alignment: Straight

Estimated Coefficient

of Friction: .70

Traffic Density: Light

TRAFFIC CONTROLS

Signals: None

Signs: No pertinent signs

Marking: Yellow center lines which permit passing

in the southbound direction, white edgelines

Speed Limit: 50 mph

**VEHICLES** 

Air Bag Vehicle #2

Description: 1989 Dodge Daytona, 1983 Toyota Corolla, 2 dr. hatchback 4 dr., station wagon

V.I.N.: 1B3XG44K3KG (production JT2AE72W0D5 (production

number deleted) number deleted)

Color: Red Brown

Odometer: 22,892 miles 88,636 miles

Engine: 4 cylinder, 2.5 liter 4 cylinder

Transmission: 5-speed manual, floor

mounted transmission lever

Steering: Power assisted rack and

pinion

Brakes: Power four-wheel disc

Padding: Upper, mid, and lower

instrument panel, soft edged steering wheel rim and air bag module cover, door panels, door armrests, adjustable head

restraints

# VEHICLES (CONT'D.)

# Air Bag Vehicle

Vehicle #2

Active Restraints:

3-point lap and shoulder belts in the front outboard seated positions, 2 rear

seat lap belts

Passive Restraints:

Driver air bag system that deployed as a result of the

sideswipe type impact

Defects:

None

The air bag equipped 1989 Dodge

Tow Status:

Towed due to damage

Towed due to damage

#### VEHICLE DAMAGE

#### Air Bag Vehicle

Exterior:

Daytona sustained moderate damage from its sideswipe type impact sequence with vehicle #2. Initial contact involved the extreme left front corner of the bumper facia, outboard of the bumper reinforcement bar. facia was displaced both rearward and laterally to the vehicle's right which allowed the leading edge of the left front fender to engage with vehicle #2 resulting in 7" of crush located at the fender's leading edge. The left bumper energy absorbing device (EAD) compressed 0.125" then returned to its original position. Direct contact damage on the frontal plane began 26.9" left of the vehicle's centerline and extended 0.875" to the corner of the bumper facia. Direct damage also extended 122" down the left side of the vehicle ending at the leading edge of the left rear wheel opening. Crush values could not be measured across the frontal plane due to the narrow contact width; therefore, a set of crush values were measured at the mid-door level of the left side surface. The C-measurements over the 122" direct contact length were as follows:  $C_1=0.1$ ",  $C_2=0.5$ ",  $C_3=2.5$ ",  $C_4=3.2$ ",  $C_5=1.5$ ",  $C_6=2.2$ ".

## Vehicle #2

Vehicle #2 also sustained moderate damage from its involvement with the air bag vehicle. Direct frontal contact was 2.5" located at the left front bumper corner and turn signal assembly. Due to the minimal frontal contact, the left side of the Toyota engaged with the side of the Daytona resulting in 163.25" of direct contact damage which extended down the entire left side of the vehicle.

Crush values at the left side surface were as follows:  $C_1=0.1$ ",  $C_2=1.5$ ",  $C_3=2.75$ ",  $C_4=1.75$ ",  $C_5=1.25$ ",  $C_6=0.1$ ".

Damaged components included the front bumper covering, the left turn signal assembly, left front fender, both left doors, left Apillar, windshield, and the left rear quarter panel.

#### VEHICLE DAMAGE (CONT'D.)

Air Bag Vehicle

Vehicle #2

Exterior
(Cont'd.):

Components damaged by the impact involved the front bumper facia, the left front fender, upper radiator support panel, left front tire and wheel, left door, left outside rear view mirror, and the left rear

quarter panel.

CDC:

12-FLES-9

12-FLES-9

Repair Cost: \$5830.26 (preliminary estimate)

Total loss

Interior
(Air Bag
Vehicle):

The interior of the air bag vehicle sustained minor damage that was associated solely with occupant loading. The driver's involvement with the steering assembly resulted in deformation of the spoke flange. The left upper quadrant of the steering wheel rim was displaced approximately 1" forward due to the spoke flange deformation. Her loading force also compressed the energy absorbing steering column 1.6" with 1.1" of left shear capsule separation.

#### AIR BAG SYSTEM

The driver air bag system of the Dodge Daytona was intact during FRC's inspection of the vehicle and there was no visible damage to the components. The investigating police officer noted on his report that "the air bag blew up in the driver's face causing her to lose control and cross over into the opposite lane." The driver did not state this during our interview with her nor did she blame the system as a cause of the accident. She did state that she was looking in her rear view mirror when the accident occurred.

Representatives from one of Chrysler's regional offices tested the system's diagnostic module for stored faults. No transient faults were recorded that could have caused an inadvertent deployment. The undercarriage of the vehicle and the accident scene were inspected for evidence of an impact that could have caused air bag deployment. No damage or road defects were found.

#### VEHICLE VELOCITY ESTIMATES

The sideswipe type damage and impact configuration are outside the scope of the CRASHPC program; therefore velocity changes could not be computed for this crash.

#### COLLISION SEQUENCE

Pre-Crash:

The Dodge Daytona was traveling in a southerly direction on the two lane state route at a driver estimated speed of 50 mph. She stated that she was looking in her rear view mirror as her vehicle crossed the center line into the northbound travel lane. Vehicle #2 was traveling in a northerly direction at an unknown, but reasonable rate of speed.

Crash:

The extreme left frontal corner area of the Dodge Daytona initially impacted the left front corner of vehicle #2. As the vehicles continued forward, the sides of the vehicles became engaged, resulting in a sideswipe type collision. Both vehicles sustained impact forces of 12 o'clock; however, due to the sideswipe type configuration, velocity changes could not be computed by the CRASHPC program. The longitudinal deceleration was of sufficient magnitude to deploy the Daytona's driver air bag system.

As the vehicles separated, the drivers braked and brought their respective vehicles to a controlled stop.

#### Post-Crash:

Final Rest - The involved vehicles were brought to controlled stops on the shoulders of the roadway facing in their original direction of travel.

Driver The control of 
The driver of the Daytona stated that she heard a bang at impact that she associated with air bag deployment. She also noted a dust-like substance within the vehicle as it came to rest. She immediately exited the vehicle from the right door and waited for police to arrive on-scene.

Police Activities - A single police unit responded to the accident scene. The officer called for tow and rescue assistance as he initiated his investigation.

Rescue Activities - A rescue unit treated the driver of the air bag vehicle at the scene and transported her to a local hospital where she was treated for her injuries and released.

Scene Clearance - Both vehicles sustained disabling damage and were towed from the scene.

# HUMAN FACTORS/OCCUPANT DATA

Air Bag Vehicle

Vehicle #2

Driver:

22 year old female

34 year old male

Height:

59"

Weight:

121 lbs.

Occupation:

U.S. Army

Active Restraint

System Usage:

3-point lap and shoulder belt

Usage Source:

Driver interview, vehicle

 ${\tt inspection}$ 

Eyeglasses:

None worn

Vehicle Familiarity:

1 year

Route Familiarity:

Daily

Trip Plan:

En route to work

Manner of Leaving Scene:

Ambulance

Type of Medical Treatment:

Treated at a

and released

## AIR BAG DRIVER INJURIES

<u>Injury</u> <u>Severity</u>

Source

Abrasion of the underside

of the chin

Minor (FIAI-1)

Air bag

Abrasion of the left face

Minor (FLAI-1)

Air bag

#### AIR BAG DRIVER KINEMATICS

The driver of the Dodge Daytona was in a normal seated position at impact with both hands on the steering wheel rim. She stated that she was looking in her rear view mirror as her vehicle crossed the centerline and impacted vehicle #2. The driver's seat was adjusted to a forward position and the tilt column was set at a lower adjustment point. The 3-point lap and shoulder belt webbing did not show evidence of occupant loading; however, the latchplate was heavily scratched which indicated routine usage. She did state that she was wearing the active belt system at the time of the crash.

At impact the driver moved forward in response to the 12 o'clock direction of force impact. Her face loaded the upper portion of the deployed air bag which resulted in abrasions of the underside of her chin and of her left face. Her torso loaded the bag and the steering assembly with sufficient force to deform the spoke flange of the steering wheel rim and compress the energy absorbing steering column (1.1" of shear capsule separation). The air bag provided a sufficient ride down to protect the driver from further injury.

The doctor who treated the driver at a diagnosed her abrasions as chemical burns as he learned of her involvement with the air bag. The driver stated that her abrasions healed with only slight (temporary) discoloration of the skin.

# SELECTED PRINTS



Frontal View Of The Dodge Daytona.



Left Front Three-Quarter View.



Left Side View Of The Vehicle's Damage.



Close-up View Of The Displacement Of The Leading Edge Of The Left Front Fender.



Left Corner Of The Front Bumper Reinforcement Bar.



Left Front Bumper Energy Absorbing Device.



Daytona's Engine Compartment.



Area Of The Left Front Crash Sensor.



Left Front Crash Sensor.



Right Front Crash Sensor.



View Across The Interior From The Right Door Area.



Deployed Driver Air Bag.



Steering Wheel Deformation And Column Compression That Resulted From Occupant Loading.



Knee Bolster Reinforcement; No Damage.



Frontal View Of Vehicle #2.



Left Front Three-Quarter View.



Rearward Displacement Of The Leading Edge Of The Left Front Fender and Door.




Sideswipe Damage Extends To Rear Of Vehicle.


# SLIDE INDEX

Slide No(s).	Description
1	Accident schematic
2	Driver injury mannequin
3-5	Trajectory of the air bag vehicle
6-8	Trajectory of vehicle #2
9	Frontal view of the Dodge Daytona
10-12	Longitudinal views
13	Left front three-quarter view
14	Close-up view of the left front corner
15	Left side profile
16-18	Rearward displacement of the leading edge of the left front fender
19	Left corner of the bumper reinforcement bar, no damage
20	Left front bumper energy absorbing device
21	Left front crash sensor
22	Damage to the left front tire and wheel
23	Rearward displacement of the leading edge of the left front door
24	Left rear view of the sideswipe damage
25,26	Damage to a previous repair to the left door and quarter panel
27-29	Views of the undamaged right side area
. 30	Engine compartment
31	Perpendicular view of the upper radiator support
32	Right front crash sensor
33-35	Front undercarriage views, no damage
36	V.I.N. plate

# SLIDE INDEX (CONT'D.)

Slide No(s).	Description					
37,38	Overall interior views					
39	Driver loading of the steering wheel and EAD column					
40,41	Driver air bag					
42	Air bag identification numbers					
43	Knee bolster reinforcement panel					
44	Knee bolster					
45	Driver's seat					
46	Left front 3-point belt webbing and buckle					
47	Frontal view of vehicle #2					
48-50	Longitudinal views of the frontal sideswipe damage					
51,52	Left side views					
53,54	Left rear views of the damage					
55	Right front three-quarter view					

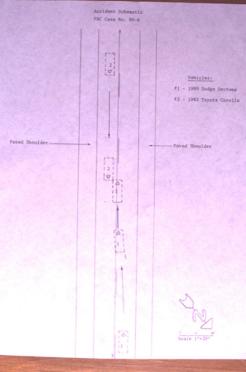



AGE 22

SEX FEMALE WT. 122 1bs. HT. .... 395












































































































## APPENDIX A

Police Accident Report

	ر ا		ΰ	15:2	ĺ	-	S. Paris	distriction of the second	all of the same	P		N.F.	-	A.	de la desta de					\ 42.0	
	-101				NEW	JERI	ILY P	OUC	E ACC	DEH.	REP	Fil	READI	1 BIEAT	HOOSTES		FC	A D.D.1	. USE GALY		
	न स्था	WE I			50 P	LE D	PUT	ien (	142	CE 24	41 8	Λυο <b>ί</b> Λ	-4.			42			ALC:		
	1 2471	01 AA	14.64	7	M BAY	02 50		ــــــــــــــــــــــــــــــــــــــ	THE TOUR	10/	(No. 6)	1678		IAD HUMBE					UNISIPAL		}
		THE CONTROL OF STATE STATE STATE OF STATES OF		<u>'</u>	Į.																
	:		70		}	1	×			0	2	10	<b>つ</b>	1/	200			. }!	and the second		1
-	TO LES	1	<u> </u>		ميداسم	18:	Acres .	HALL	204	14 J	THE P			185 vc: 4	POE! \$3	27 18	e Francis	LET, RO	ADAJAR CA	DORRAMP	
_	Bio.	6	on the material	TO ACCOUNT			Thu s	37									B Russia	er bas	V 6 3 4 2 15	COCH CE	
	SA IBENTS	7		NA MONTHS	THE PE	14-50-11	£1444	n wate		2001 DE	OR	1	-	4	本人	0			0.01.310	APCOUNT   FT	312
K	VEH. H	FOULTY.	NC.				· · · · · ·	-			3051	VEH		والمنافية					14	ME CODE	1
•		3.		عبهاد	-			<del></del>				1-2					L.,		- 1		4
Ю		ACC A			PEG	ESTALL	H WIND		PRO	LAS!		4		NO VEN.	للي	SEC.		STAL -	PERLEY		1-2
	N SAVE	HS FIR	ET MAN	L			W I'V			COURT OF	441		LHJ-JY	The section of				) . Let		SHAN TEA	711
	SE RULE	ER AUD	THE P	Ĭ			-					84 1	THE	AND THE	2						
5_	- A-						MATE.				- WARD	154								A SERVE	4
	N CITY						-				4-5	4			AUMERA DOS DAY TA EVEN			]			
-	H DIEVE	HE LICH	PHE H	AHP			開		2 00		4 K	. 4:	ALY SA	F TOTAL	AN SER			7495	NE DOS	100 BC	1
2					N					143				j		H				دم احداث	1
	SS DWN	X 2 515	77 July						1100			191 (			1Ē	`				LAST HALL	4
	区第	4.00								٠.			144	45							1
			1481		<del></del>						<u> </u>				-		-	سبسم			- 37
1	<u> </u>																				
<u> </u>	<b>4</b> 0177						BIATE	_				T MA	744				ATAT	¥.		THE STATE OF	J'
F	ER VANCE	AND M	00E			COLCA	17EY	MIL	P-495	NĆ.	PESTA	3 10	TARE	NO WOOD,		6	01.00 ICE	TAR IS	PLATE NO	17,574	3
<b>'_</b> _				DR		RD	كها				OH	170	107	A C	UAG-		W	3 3		103	3
	ויייייין	331	160	4/4	3 £6							10/	***	BAR	79 11.	mn.	7				5
1	TE VELLE		CVES T	0		<u>``</u>		73		TOWNE	A	-	/DOC.	Intervie	TO		in the same	104	(10)	Ma.	1 / 1
<u>ح</u> ـــ				***	ारा <b>व्यक्ति</b> विकास	<del>logr</del> g	l	AUIM	aurt (		à	14			1			MUL	PARTY TERM	VET.	
,	TO DUTA	LUPA	<b>a</b> t				-			7		-175	7					<del>\</del>	-		30
_			1	•		- 1		3		منطقها	-			-	• •	•	• •	3			OL
	<b>DZ</b> •	, ,	$\nearrow$	<del></del> -		<b>,</b> -		- •		INTE	SA FA	1/2		4	رد د. د	- 41 P	А	-	GYEN	DANCE 1	Pein
_	AS DIFFER PROPERTY NAME  WITH AND MARKET PROPERTY OF THE PROPE			1																	
				( 1	IJ	IL	-			/		F	ROM	n po.	INT	0 #	INGK	<b>47</b>	O NO .		20
==	1	٠, ١					•	_						-			•	_		REGULTS	61
1	-		1	T	7	-	•	_										·	@ 125		
•			•		, " 		. 1					*							€ NO		
						HTURN								-,				-	1	PEDESTRUM	1
.5	IT APEA	BALLA		DER TO	ABOVE	)		-						الأستناءة بينوس		-		_ ~	□ AE-8		<b></b>
-	•	-	773			_	- I	_	جسنے			47		C. CONTRACTOR	<b>k</b>				€ NO		-
1	3	-	湯			7		_				747.	•	and the second					MATERIAL	350	3"
1_							ᅼᆔ	-										-	1	N M	100
	57	5		U 756					1	j	1 1	1	ı	1 1	<b>{</b>		<b>i</b> )	1	ON BOARS		1
	772	SULT B	S CALL	gk	57	175	D	. 54	· P	123	A F	11	 7 /4 /	2 2 20	- 100 M	والصاب		-			-AH
									2.		7 W	44		11VE	366	-	-				111
	- 44	_	<u> </u>		4	<u> </u>	<u>////</u>	*	1046	46	PL	1970	4	ER!	ACE		06121	<u> </u>	HR.R.		
	73		-00	54	32	W	RE	36	311	C	Ros.	00	161	11.57	0/3	0441	7				<u> </u>
								ha							, ,						-
	DR	KJĒR	2	1 5	TH.	150	À	15	WA	5	TRI	1Uh	1.10	AS AL	3074	-		e outskingelij	AN	/	
	112	AS	Ni	7 2	74	Uto	WS	77							7777			<u>ئىسىن</u>			1
			سامهست. ایر درج						da .		4						5 44	-	-		4
								Z	C48_/	UR.	NAG	or	14	54 II	WA.	5 5	7766	41	FROM	K THE	
						el	191	TF D	15/	625	27/2	534	UIPI	HOIK	6 QA	2011	15_1	RE	ctro	N	
						-											_				
	MACH.	AHD BY	LTQE						HUN	MEN I	-ARE	OPL	19	S CHANGE			<del></del> -		AUMMON	A SALILIA BE	۱ ,۳۱
	WE MANTE AND MODE.  STATE  STA					لسلسل															
	1.5	7				1					_		26.7	Total I		37(	WAS END		15 STATUS	March 1	
	74	16	10	17	4	18	20	21	22			24	N	MIN-100	SE SE	OSSOUP	Gift and I	20144	D DATE A TI	HE OF DEATH	
	4		4		22	5	42	X	3					DRI	UER					7. 44.14	†
	21	1	4		Y	M	4	-			<u>-</u> ]	1	-1		IURA	2			DE 0.0	#114 e	
		1	. 7	7	T		. 1	-			1	2.7		-					<ul><li>BEST</li></ul>	AVAILABLE !	COPY

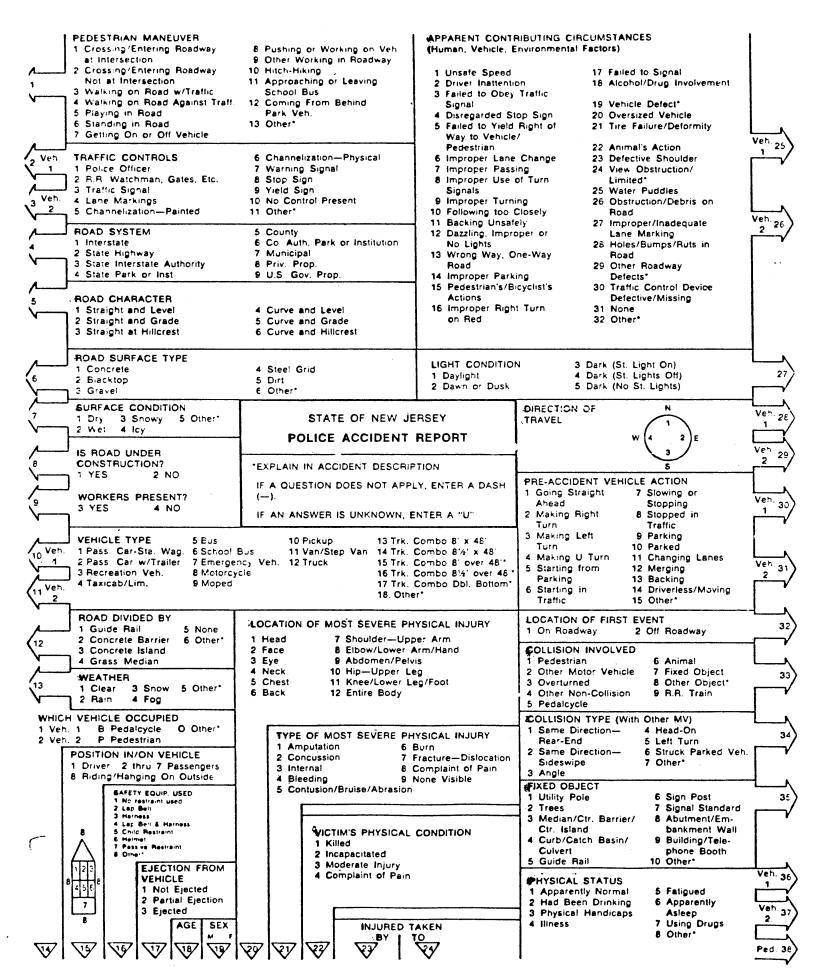

APPENDIX B

Air Bag Supplement

Dup. Cols. 1-8 Mod	dule A B F	ormat <u>Q</u> 1	AIRBAG SUPPLEMENT	AB-1
ACCIDENT SUMMARY		AIRBAG	VEHICLE INSPECTION	
ACCIDENT DATE	190	DATE V	EH. INSPECTED	190
POLICE INVESTIGATED (1,2	,9)* <u> </u>	_ REASON	VEHICLE NOT INSPECTED	
City County		(1) In (2) Ca (3) Re	t Required spection Completed nnot be Located** paired or Destroyed** fual or impounded**	
SENERAL LOCALITY (1) Freeway, Limited A (2) Urban (City)	4	(7) Ot		-
<ul><li>(3) Urban-Rural (mixed</li><li>(4) Rural, Fields</li></ul>	)	IMPACT	DATA OBTAINED	4
ONFIGURATION (First Har (0) Struck Object or Ped		(1) CD	Data Obtained C Only Sush Profile Only	
<ol> <li>Rear-End</li> <li>Head-On</li> <li>Rear-to-Rear</li> <li>Angle</li> <li>Sideswipe-Same Direct</li> </ol>	tion	(4) CD (5) CD (6) Cr	Tajectory Data Only OC and Crush Profile OC and Trajectory Tush and Trajectory OC, Crush & Trajectory	
<ul><li>(6) Sideswipe-Opposite D</li><li>(7) NonColl:eg Fell from</li><li>(8) NonImpact Deployment</li><li>(9) Unknown</li></ul>	Veh	(0) No	OF DELTA-V of Computed (Unknown Why) RASH - Damage Only	7
FIRE INVOLVED (0) None (1) AirBag Vehicle (2) Other Vehicle (3) Both Vehicles (9) Unknown		(2) CF (3) M1 (4) Y1 (5) Ur (6) Or	RASH - Damage+Trajectory Issing Vehicle Algorithm Ielding Object Algorithm Inknown Basis The Vehicle Beyond Scope Oilision Beyond Scope	
NUMBER: VEHICLES INVOLVE (8)=8 or more PERSONS INVOLVE		- (8) 11	CLE HISTORY	
INJURED PERSONS		L HAS A	IRBAG VEHICLE BEEN IN	1
MAXIMUM AIS IN ACCIDENT			PRIOR IMPACTS (1,2,9)*  NY PRIOR MAINTENANCE/SERV	ICE 2
OTHER VEHICLE: MAXIMUM	AIS C	BEEN	PERFORMED ON SYSTEM(1,2,	9)*
PRIME/DEPLOY IMPACT w AE EVENT NUMBER	3 VEH:			
CDC IZ-FLES	<b>i</b>			
TOTAL DELTA-V	ਤ	9 AIRBA	G VEHICLE: FLEET DAYTONA	
Model Year, Make, Model,	Body Type:		AIN TR3XPAA	
83 TOYOTA COROL	<u> </u>		MILEAGE 22, 892	
* (1)=Yes, (2)=No, (9)=	=Unknown	26	DRAFT - 09/04/85	


SYSTEM READINESS LAMP (In Instrument Cluster)		AIRBAG VEHICLE FIRST HARMFUL EVENT	_13_
RE-IMPACT LAMP CONDITION  (1) Functioning/ProvedOut (2) Inoperative (9) Unknown	1	(01) Fire or explosion (02) Immersion (03) Gas Inhalation (04) Fell from vehicle (05) Injured in vehicle (06) Other moncollision (specify):	
URIVER'S REPORT OF PRE-IMPACT FLASHING  (00) No Flashing Reported (01) Continuous Flashing (02) > Number of Flashes (11) (12) Constant Light (19) Flashing, Unkn Number (88) Not App (system removed) (99) Unknown	00	(07) Overturn (08) Jackknife with intraunit damage Collision With: (09) Pedestrian (10) Pedalcyclist (11) Railway train (12) Animal (13) Motor vehicle in transport (same roadway) (14) Motor vehicle in transport (other roadway) (15) Parked motor vehicle	
PERIOD OF PRE-IMPACT FLASHING  (0) No Flashing (1) Same Day as Impact (2) Prior Day (3) Prior Two Days (4) Prior Week (5) Prior Month (6) Over One Month (9) Unknown	0_	(16) Other type nonmotorist (specify): (17) Thrown or falling object (18) Boulder Collision with Fixed Object: (20) Building (21) Impact attenuator/Crash Cushion (22) Bridge pier or abutment (23) Bridge parapet end (24) Bridge rail (25) Guardrail (26) Concrete traffic barrier (27) Median barrier (28) Other longitudinal barrier (specify): (29) Highway/Traffic sign post	
OST-IMPACT LAMP CONDITION  (1) Functioning/ProvedOut (2) Inoperative (9) Unknown	2	<ul> <li>(30) Overhead sign support</li> <li>(31) Luminaire/Light support</li> <li>(32) Utility pole</li> <li>(33) Other post, pole, or support (specify):</li> <li>(34) Culvert</li> <li>(35) Curb</li> <li>(36) Ditch</li> </ul>	
'OST-IMPACT FLASHING  (00) No Flashing (01) Continuous Flashing (02) > Number of Flashes (11) (12) Constant Light (19) Flashing, Unkn Number (88) Not Appl (removed) (99) Unknown	88	<ul> <li>(37) Embankment-earth</li> <li>(38) Embankment-rock, stone or concrete</li> <li>(39) Fence (wooden, wire, chain link, etc.)</li> <li>(40) Wall (stone, rock, metal, etc.)</li> <li>(41) Fire hydrant</li> <li>(42) Shrubbery</li> <li>(43) Tree</li> <li>(44) Other fixed object (specify):</li> <li>(45) Pavement surface irregularity (pothole, grooved, grates)</li> <li>(99) Unknown</li> </ul>	

IRBAG VEHICLE IMPACT-DAMAGE		AIRBAG SUPPLEMENT	AB-3
IRBAG VEHICLE IMPACT SUMMARY	ì	FIRST AIRBAG VEHICLE IMPACT:	
VEHICLE ROLE	1	CONFIGURATION	2
<ul> <li>Non-collision</li> <li>Striking Unit</li> <li>Struck Unit</li> <li>Both Striking and Struck</li> <li>Unknown</li> <li>Unknown</li> <li>CANNER OF LEAVING SCENE</li> <li>Driven</li> <li>Towed-due to damage</li> <li>Towed - not for damage</li> </ul>	2	(0) Struck Object or Pedestrian (1) Rear-End (2) Head-On (3) Rear-to-Rear (4) Angle (5) Sideswipe - Same Direction (6) Sideswipe-Opposite Direct. (7) NonColl:eg Fell from Veh (8) NonImpact Deployment (9) Unknown	
(4) Towed - details unknown (5) Abandoned		CDC TY - E F E 7 - 5	
3) Unknown		OBJECT CONTACTED: TOYOTA COROL	LA
NUMBER OF IMPACT EVENTS (8) 8 or more, (9) Unknown  ROLLOVER (0) No Rollover (1) First Event (2) Subsequent Event (3) Yes, UnknownEvent (9) Unknown	0	PRIMARY/DEPLOYMENT.IMPACT:  EVENT NUMBER  TOTAL DELTA-V	1 9
VERRIDE/UNDERRIDE	1_	LONGITUDINAL DELTA-V CONFIGURATION	97
1) No over/underride 1) Override - 1st CDC (3) - Other CDC (4) Underride - 1st CDC 5) - Other CDC (3) Unknown		(0) Struck Object or Pedestrian (1) Rear-End (2) Head-On (3) Rear-to-Rear (4) Angle	
IRBAG VEHICLE DAMAGE  CODES: (1) Yes, DAMAGED		<ul> <li>(5) Sideswipe - Same Direction</li> <li>(6) Sideswipe-Opposite Direct.</li> <li>(7) NonColl:eg Fell from Veh</li> <li>(8) NonImpact Deployment</li> </ul>	
(2) No Damage (9) Unknown		(9) Unkonwn	
FEFT FRONT FENDER DAMAGE		CDC 12-ECES-9	4
KIGHT FRONT FENDER DAMAGE	2	OBJECT CONTACTED: TOYOTA COROL	<u></u>
ENTER TOP OF GRILLE DAMAGE	2	NOTES:	
TRONT BUMPER E.A. STATUS: Left	3		
(1) Normal Right (2) Extended 3) Partial Compression (4) Complete Compression (5) Not Applicable 9) Unknown		BEST AVAILABL	E COPY
		28	

ISTEM DAMAGE		AIRBAG SUPPLEMENT	AB-4
IRBAG SYSTEM DAMAGE		CONDITION OF DEPLOYED BAG	1
CODES: (1) Yes, Damaged* (2) No, Intact (8) Not App.(Removed) (9) Unknown  AIRBAG MODULE  SENSORS: Left Front  Center Front	2 2 8	<pre>(1) Bag Intact (2) Split or Torn* (3) Cut by Object in impact* (4) Cut after Accident* (5) Other (e.g., burned)* (8) N/A (not deployed) (9) Unknown  *DESCRIBE System and Bag Damage:</pre>	
Right Front	2		
Rear, Cowl	2		
DIAGNOSTIC MODULE :	_2		
WIRING	_2		
KNEE DIVERTER	2		
NDICATION OF DISCONNECTED OR LOOSE ELECTRICAL CONNECTORS	1		

NOTE DAMAGE AND CONTACT MARKS ON AIRBAG DIAGRAMS BELOW:

NO EUIDENCE UE
CONTACT

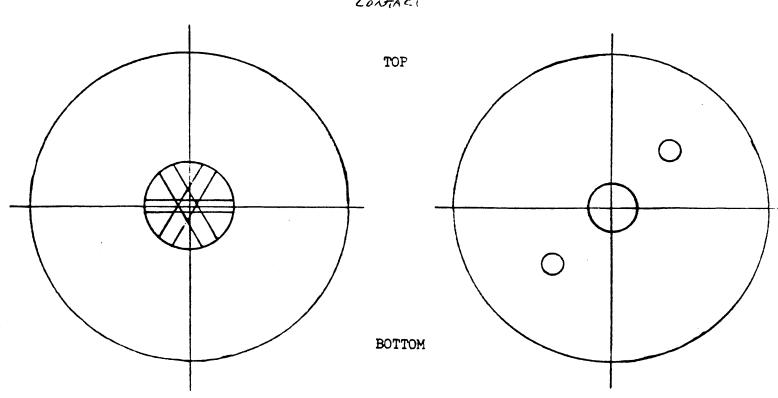

DCCUPANTS/DRIVER			AIRBAG	SUPPLEMENT	<b>A</b> B-5
OCCUPANTS of AIRBAG CAR  JMBER OF OCCUPANTS IN VEHICLE (8) 8 or more NUMBER OF INJURED PERSONS  LAXIMUM AIS IN AIRBAG VEHICLE (0) No Injury 1-6) AIS Severity (7) Injured, Unknown Severity (9) Unknown	<u> </u>	NOTES:			
JMBER OF DRIVER INJURIES  SOURCE OF BEST INJURY DATA  (0) Not injured (1) Autopsy w/wo med. records (2) Hospital Medical Records (3) Emergency Room only (4) Private physician, Clinic (5) Lay Coroner Report (6) EMS Personnel (7) Interviewee (8) Police (9) Unknown	2 3		٠		
REGION MAX AIS CON	TACT S				

DRIVER-PASSENGER		<b>A</b>	RBAG	SUPPLEMENT	<b>A</b> B-6
DRIVER BELT USAGE:	(1) Used	(2) Not Used	. (9	) Unknown	
Evidence: <u>OR</u>	WER INTERVIE	N DEVICE I	NSPECT	TION	
DRIVER POSTURE:	Any Comments	Recorded (1)	Yes, (	2) No	i
Describe driver's pos on head, torso, butto Did driver brace befo	cks, legs and f	eet. Also note	luding hand	specific co and arm posi	mment tion.
400 KIN	UC IN REAG	JIEW MIRKOR			·
					_
DRIVER FOREIGN OBJECT	S: Comments Rec	orded (1) Yes,	(2)	No	<u>d</u>
Was driver wearing co object at the time of	ntact lenses or the impact (pa	eyeglasses? ckages on lap,	Or hol	ding any for food, bottl	le,
Was driver wearing co object at the time of cigarette, etc.)? Did	ntact lenses or the impact (pa any lenses, ob	eyeglasses? ckages on lap,	Or hol pipe, iry pi	ding any for food, bottl ay any role:	le,
Was driver wearing co object at the time of cigarette, etc.)? Did  DRIVER COMMENTS: Was the driver aware restraint system? Di	comments Rec	eyeglasses? ckages on lap, jects, or jewe  orded (1) Yes, e was equipped any comments o	Or hol pipe, iry pi (2) N with n smok	ding any for food, bottlay any role?  o a supplemente, noise, et	tal
Was driver wearing co object at the time of cigarette, etc.)? Did  DRIVER COMMENTS: Was the driver aware restraint system? Did Did the driver commen	comments Rec	eyeglasses? ckages on lap, jects, or jewe  orded (1) Yes, e was equipped any comments o as a restrain	Or hol pipe, iry pi  (2) N with n smok t syst	ding any for food, bottle ay any role?  o a supplement e, noise, et em? Describ	tal
Was driver wearing co object at the time of cigarette, etc.)? Did  DRIVER COMMENTS: Was the driver aware restraint system? Did Did the driver commen	Comments Rec that the vehicl d driver offer t on the airbag	eyeglasses? ckages on lap, jects, or jewe  orded (1) Yes, e was equipped any comments o as a restrain	Or hol pipe, iry pi  (2) N with n smok t syst	ding any for food, bottle ay any role?  o a supplement e, noise, et em? Describ	tal
DRIVER FOREIGN OBJECT Was driver wearing co object at the time of cigarette, etc.)? Did  DRIVER COMMENTS: Was the driver aware restraint system? Did the driver commen  MOTICED SMOKE  PASSENGER-AIRBAG CONT	Comments Rect that the vehicle driver offer to the airbag	eyeglasses? ckages on lap, jects, or jewe  orded (1) Yes, e was equipped any comments o as a restrain	Or hol pipe, iry pi  (2) N with n smok t syst	ding any for food, bottlay any role?  o a supplemente, noise, etem? Describ	tal

## APPENDIX C

NASS Vehicle Forms

# **GENERAL VEHICLE FORM**

NATIONAL ACCIDENT SAMPLING SYSTEM CRASHWORTHINESS DATA SYSTEM

Administration	
1. Primary Sampling Unit Number  2. Case Number — Stratum  3. Vehicle Number  VEHICLE IDENTIFICATION  4. Vehicle Model Year Code the last two digits of the model year (99) Unknown  5. Vehicle Make (specify):  OOGE  Applicable codes are found in your NASS CDS Data Collection, Coding, and Editing Manual. (99) Unknown  6. Vehicle Model (specify):  O 1 5	11. Police Reported Alcohol or Drug Presence (0) Neither alcohol nor drugs present (1) Yes (alcohol present) (2) Yes (drugs present) (3) Yes (alcohol and drugs present) (4) Yes (alcohol or drugs present – specifics unknown) (7) Not reported (8) No driver present (9) Unknown  12. Alcohol Test Result for Driver Code actual value (decimal implied before first digit – 0.xx) (95) Test refused (96) None given (97) AC test performed, results unknown (98) No driver present (99) Unknown
	<b>C</b>
DAYTONA	Source
Applicable codes are found in your NASS CDS Data Collection, Coding, and	ACCIDENT RELATED
Editing Manual.	<b>~</b> ^
(999) Unknown	13. Speed Limit <u>5</u> <u>0</u>
~ 2	(00) No statutory limit
7. Body Type <u>O3</u>	Code posted or statutory speed limit
Note: Applicable codes are found on	(99) Unknown
the back of this page.	14. Attempted Avoidance Maneuver
8. Vehicle Identification Number	(00) No impact
6. Vehicle Identification Number	(01) No avoidance actions
TB3XCAAK3KC	(02) Braking (no lockup)
	(03) Braking (lockup)
Left justify; Slash zeros and letter Z (Ø and ∠) No VIN—Code all zeros	(04) Braking (lockup unknown) (05) Releasing brakes
Unknown – Code all nine's	(06) Steering left
STIMIOWIT GOOD ON THING S	(07) Steering right
	(08) Braking and steering left
OFFICIAL RECORDS	(09) Braking and steering right
0.001100.000.000.000	(10) Accelerating
9. Police Reported Vehicle Disposition	(11) Accelerating and steering left
(0) Not towed due to vehicle damage (1) Towed due to vehicle damage	(12) Accelerating and steering right (97) No driver present
(9) Unknown	(98) Other action (specify):
10. Police Reported Travel Speed 9	(99) Unknown
Code to the nearest mph (NOTE: 00 means	15. Accident Type64
less than 0.5 mph)	Applicable codes may be found on the back
(97) 96.5 mph and above	of page two of this field form
(99) Unknown	(00) No impact
	Code the number of the diagram that
	best describes the accident circumstance
	(98) Other accident type (specify):
	(99) Unknown
	(33) OHKHOWH
**** STOP HERE IF GV07 D	OES NOT EQUAL 01-49 ****

HS Form 435 (Rev. 1/90)

#### **CODES FOR BODY TYPE**

#### CDS APPLICABLE VEHICLES

#### **Automobiles**

- (01) Convertible (excludes sun-roof, t-bar)
- (02) 2-door sedan, hardtop, coupe
- (03) 3-door/2-door hatchback
- (04) 4-door sedan, hardtop
- (05) 5-door/4-door hatchback
- (06) Station wagon (excluding van and truck based)
- (08) Other automobile type (specify):
- (09) Unknown automobile type

#### Automobile Derivatives

- (10) Auto based pickup (includes El Camino, Caballero, Ranchero, and Brat)
- (11) Auto based panel (cargo station wagon, includes auto based ambulance/hearse)
- (12) Large limousine more than four side doors or stretched chassis

#### **Utility Vehicles**

- (13) Short utility—not truck based (includes Jeep CJ-5, Jeep CJ-7, Renegade, Landrover, Pre-78 Bronco, Landcruiser, Thing)
- (14) Truck based utility (2-door; includes Blazer, Bronco 78 on, Bronco II, Jimmy, Ramcharger, Cherokee, Trailduster, Scout)

#### Van Based Light Trucks (\* 10,000 lbs GVWR)

- (20) Minivan (Lumina APV, Astro, Caravan, Plymouth Vista, Aerostar, Safari, Voyager [84 and after], Dodge Vista, Mini Ram Van, Toyota Cargo Van, Toyota Van, Vanagon, VW Bus, Kombi)
- (21) Standard van (Sportvan, Chevy Van, Club Wagon, Ford Econoline, Ram Van, Chateau, Ram Wagon, Vandura, Rally, Voyager [83 and before], Beauville, Sportsman)
- (28) Other van type (specify): \_\_
- (29) Unknown van type

# Light Conventional Trucks (Pickup Style Cab, 10,000 lbs GVWR)

- (30) Compact pickup (- 4,500 lbs. GVWR, S-10, LUV, Ram 50, Rampage, Courier, Ranger, S-15 Pup, Mazda Pickup, Mitsubishi Truck, Nissan Pickup, Arrow Pickup, Scamp, Toyota Pickup, VW Pickup)
- (31) Standard pickup (4,500 to 10,000 lbs. GVWR, C10 C30, K10 K30, T10, D100 D350, W150 W350, F100 F350, Comanche, J10 J30, Dakota)
- (32) Pickup with slide-in camper
- (33) Truck based station wagon (4-door; includes Suburban, Travelall, Wagoneer)
- (34) Light truck based suburban limousine
- (35) Convertible pickup
- (39) Unknown (pickup style) light conventional truck type

Other Light Trucks ( 10,000 lbs GVWR)

- (40) Cab chassis based (includes rescue vehicle, light stake, dump, and tow truck)
- (41) Truck based panel
- (42) Light truck based motorhome (chassis mounted)
- (47) Other light conventional truck type (not a pickup) (specify):
- (48) Unknown other light truck type (not a pickup)
- (49) Unknown light vehicle type (automobile, van, or light truck)

#### OTHER VEHICLES

#### Buses (Excludes Van Based)

- (50) School bus (designed to carry students, not cross country or transit)
- (58) Other bus type (e.g., transit, intercity, bus based motorhome) (specify):
- (59) Unknown bus type

Medium/Heavy Trucks ( .10,000 lbs GVWR)

- (60) Step van
- (61) Single unit straight truck (10,000 lbs < GVWR < 26,000 lbs)
- (62) Single unit straight truck ( ·26,000 lbs GVWR)
- (63) Medium/heavy truck based motorhome
- (64) Truck-tractor with no cargo trailer
- (65) Truck-tractor pulling one trailer
- (66) Truck-tractor pulling two or more trailers
- (67) Truck-tractor (unknown if pulling trailer)
- (68) Unknown medium/heavy truck type
- (69) Unknown truck type (light/medium/heavy)

Motored Cycles (Does Not Include All-Terrain Vehicles/Cycles)

- (70) Motorcycle
- (71) Moped (motorized bicycle)
- (78) Other motored cycle type(minibike, motorscooter) (specify):
- (79) Unknown motored cycle type

#### Other Vehicles

- (80) ATV (All-Terrain Vehicle) and ATC (All-Terrain Cycle)
- (88) Other vehicle type (specify):
- (99) Unknown body type

OCCUPANT RELATED	
16. Driver Presence in Vehicle (0) Driver not present (1) Driver present (9) Unknown  17. Number of Occupants This Vehicle (00-96) Code actual number of occupants for this vehicle (97) 97 or more (99) Unknown  18. Number of Occupant Forms Submitted  VEHICLE WEIGHT ITEMS  19. Vehicle Curb Weight 22SL Code weight to nearest 100 pounds. (010) Less than 1050 pounds	24. Rollover (0) No rollover (no overturning)  Rollover (primarily about the longitudinal axis) (1) Rollover, 1 quarter turn only (2) Rollover, 2 quarter turns (3) Rollover, 3 quarter turns (4) Rollover, 4 or more quarter turns (specify):  (5) Rollover—end-over-end (i.e., primarily about the lateral axis) (9) Rollover (overturn), details unknown  OVERRIDE/UNDERRIDE (THIS VEHICLE)  25. Front Override/Underride (this vehicle)
(135) 13,500 lbs or more (999) Unknown  Source:  20. Vehicle Cargo Weight ——Code weight to nearest 100 pounds. (00) Less than 50 pounds (97) 9,650 lbs or more (99) Unknown  RECONSTRUCTION DATA  21. Towed Trailing Unit (0) No towed unit (1) Yes—towed trailing unit (9) Unknown	(0) No override/underride, or not an end-to-end impact  Override (see specific CDC) (1) 1st CDC (2) 2nd CDC (3) Other not automated CDC (specify):  Underride (see specific CDC) (4) 1st CDC (5) 2nd CDC (6) Other not automated CDC (specify):  (7) Medium/heavy truck override (9) Unknown
22. Documentation of Trajectory Data for This Vehicle (0) No (1) Yes  23. Post Collision Condition of Tree or Pole (for Highest Delta V) (0) Not collision (for highest delta V) with tree or pole (1) Not damaged	HEADING ANGLE AT IMPACT FOR HIGHEST DELTA V  Values: (000)-(359) Code actual value (997) Noncollision (998) Impact with object (999) Unknown  27. Heading Angle for This Vehicle  3 5 5
<ul> <li>(2) Cracked/sheared</li> <li>(3) Tilted &lt; 45 degrees</li> <li>(4) Tilted ≥ 45 degrees</li> <li>(5) Uprooted tree</li> <li>(6) Separated pole from base</li> <li>(7) Pole replaced</li> <li>(8) Other (specify):</li> <li>(9) Unknown</li> </ul>	28. Heading Angle for Other Vehicle <u>L &amp; O</u>

Cate- gory	Configur- ation	ACCIDENT TYPES (Includes Intent)		
	A Right Roadside Departure	DRIVE OFF CONTROL/ AVOID COLLISION SPE		05 SPECIFICS UNKNOWN
I. Single Driver	B Left Roadside Departure		CIFICS	10 SPECIFICS UNKNOWN
<del></del>	C Forward Impact		CIFICS	16 SPECIFICS UNKNOWN
Trafficway Direction	D Rear-End	23 27 76 31	CIFICS	(EACH • 33)  SPECIFICS UNKNOWN
II. Same Trafficwa Same Direction	F Forward Impact	CONTROL/ CONTROL/ AVOID COLLISION AVOID COLLISION TRACTION LOSS TRACTION LOSS WITH VEH. WITH OBJECT	SPECIFICS OTHER	2) (EACH • 43)  SPECIFICS UNKNOWN
	F Sideswipe Angle	44 45 45 (EACH · 48) SPECIFICS OTHER	(EACH SPECIFIC	• 49) s unknown
ay ction	G Head-On	50 51 (EACH • 52) (EACH • 53)  SPECIFICS OTHER SPECIFICS UNKNOWN		
Same Trafficway Opposite Direction	H Forward Impact	54 55 56 57 58 59 60 CI AVOID COLLISION WITH VEH. WITH OBJECT		SPECIFICS UNKNOWN
Ξ	l Sideswipe Angle	65 (EACH • 66) (EACH • 67)  SPECIFICS SPECIFICS UNKNOWN  LATERAL MOVE OTHER		
Change Trafficway Vehicle Turning	J. Turn Across Path	69 71 73 72 INITIAL OPPOSITE INITIAL SAME DIRECTIONS DIRECTIONS	(EACH • 74 SPECIFICS OTHER	SPECIFICS UNKNOWN
<u>5</u>	K Turn Into Path	TURN INTO SAME DIRECTION  79  81  82  TURN INTO OPPOSITE DIRECTIONS	(EACH • 84 SPECIFICS OTHER	SPECIFICS UNKNOWN
V Intersecting Paths (Vehicle Damage)	L Straight Paths	87 (EACH • 90) 88 89 SPECIFICS OTHER	(EACH • 91 SPECIFICS U	
VI. Miscellaneous	M. Backing Etc.	92 93 OTHER VEH. 98 Other Accident T OR OBJECT 99 Unknown Accide VEH. 00 No Impact		

29. Basis for Total Delta V (Highest) <u>5</u>	Secondary Highest
Delta V Calculated (1) CRASH program – damage only routine (2) CRASH program – damage and trajectory routine (3) Missing vehicle algorithm  Delta V Not Calculated (4) At least one vehicle (which may be this vehicle) is beyond the scope of an acceptable reconstruction program, regardless of collision conditions.  (5) All vehicles within scope (CDC applicable) of CRASH program but one of the collision conditions is beyond the scope of the CRASH program or other acceptable reconstruction techniques, regardless of adequacy of damage data.  (6) All vehicles and collision conditions are within scope of one of the acceptable reconstruction programs, but there is insufficient data available.  COMPUTER GENERATED DELTA V  Secondary Highest  30. Total Delta V  Nearest mph  (NOTE: 00 means less than 0.5 mph) (97) 96.5 mph and above (99) Unknown	32. Lateral Component of Delta V  Nearest mph  (NOTE:00 means greater than0.5 and less than + 0.5 mph) (±97) ±96.5 mph and above (99) Unknown  33. Energy Absorption  Nearest 100 foot-lbs  (NOTE: 0000 means less than 50 Foot-Lbs) (9997) 999,650 foot-lbs or more (9999) Unknown  34. Confidence in Reconstruction Program Results (for Highest Delta V) (0) No reconstruction (1) Collision fits model – results appear reasonable (2) Collision fits model – results appear high (3) Collision fits model – results appear low (4) Borderline reconstruction – results appear reasonable  35. Type of Vehicle Inspection (0) No Inspection (1) Complete inspection (2) Partial inspection (specify):
31. Longitudinal Component of Delta V Nearest mph (NOTE:00 means greater than 0.5 and less than + 0.5 mph) (±97) ±96.5 mph and above ( 99) Unknown	36. Is this an AOPS Vehicle? (0) No (1) Yes
	LE WAS NOT INSPECTED (I.E., GV35 = 0), *** R AND INTERIOR VEHICLE FORMS.



#### **EXTERIOR VEHICLE FORM**


NATIONAL ACCIDENT SAMPLING SYSTEM National Highway Traffic Safety CRASHWORTHINESS DATA SYSTEM Administration 0 | 1. Primary Sampling Unit Number 3. Vehicle Number 90-05 2. Case Number - Stratum VEHICLE IDENTIFICATION 1B3X644 K3 K6 VIN Vehicle Make (specify): \_\_\_\_\_\_\_\_\_\_\_\_\_\_\_ Vehicle Model (specify): DAYTONA **LOCATOR** Locate the end of the damage with respect to the vehicle longitudinal center line or bumper corner for end impacts or an undamaged axle for side impacts. Specific Impact No. Location of Direct Damage Location of Field L LEFT FRONT CORNER AREA LEFT SIDE SURFACE FRUNTAL **CRUSH PROFILE** NOTES: Identify the plane at which the C-measurements are taken (e.g., at bumper, above bumper, at sill, above sill, etc.) and label adjustments (e.g., free space). Measure and document on the vehicle diagram the location of maximum crush. Measure C1 to C6 from driver to passenger side in front or rear impacts and rear to front in side impacts. Free space value is defined as the distance between the baseline and the original body contour taken at the individual C locations. This may include the following: bumper lead, bumper taper, side protrusion, side taper, etc. Record the value for each C-measurement and maximum crush.

Use as many lines/columns as necessary to describe each damage profile.

Specific	Plane of	Direct D	)amage	Field							1
Impact Number	C-Measurements	Width (CDC)	Max Crush	L	C <sub>1</sub>	C <sub>2</sub>	C <sub>3</sub>	C <sub>4</sub>	C <sub>5</sub>	C <sub>6</sub>	±D
l	LEFT SIDE	.87s"	7 "	(22°	0.1"	0.5"	2.5"	3,2,	1.5"	<i>2</i> .2"	t24.6"
	SURFACE										
						·					
	· · · · · · · · · · · · · · · · · · ·										
	1										

HS Form 435A

1/89

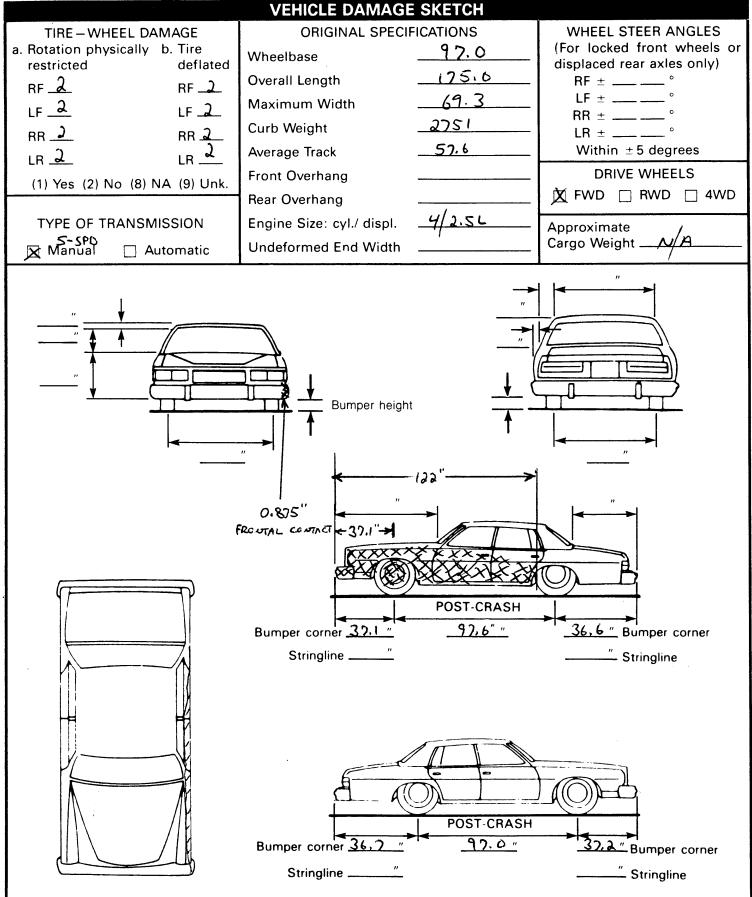

NOTES: Sketch new perimeter and cross hatch direct damage and single hatch induced damage on all views. Annotate observations which might be useful in reconstructing the accident (e.g., grass in tire bead, direction of striations, scuff on sidewall, etc.). If pulling trailer, sketch type of trailer and damage received on the back of this page.

Annotate any damage caused by extrication such as component removal by torching, prying, or hydraulic shears.

	oluone oum	omig Cysten		NO MACRICO		T. CALCII	Of Vernoie		rage	
			UL.	OC WORKS	HEE					
i .			CODES F	OR OBJECT	CON	TACTED				
01-30-	Vehicle Num	nber			(57)	Fence				
Noncol	lision				(58)					
	Overturn – ro	ollover			(59)	Building				
	Fire or explo					Ditch or C	Culvert			
	Jackknife <sup>'</sup>					Ground				
(34)	Other intrau	nit damage	(specify):			Fire hydra	int			
						Curb				
(35)	Noncollision	iniurv				Bridge	-1 - 1: · · · · · ·	• • •		
	Other nonco		ify):		(68)	Other fixe	d object (s	pecify):		
(20)	Noncollision	dotoilo		·····	(69)	Unknown	fixed object	et		
			known	С	ollisio	n With No	onfixed Obi	ect		
	n with Fixed				Collision With Nonfixed Object (71) Motor vehicle not in transport					
	Tree (≤4 inc		•		(72) Pedestrian					
	Tree (>4 inc		eter)		(73) Cyclist or cycle					
	(43) Shrubbery or bush (44) Embankment				(74) Other nonmotorist or conveyance (specify)					
(45)	Breakaway n	nole or nost	(any diamete	r)	(75)	Vehicle oc	cupant			
		•	(arry diameter	' '		Animal	•			
	Nonbreakaway Pole or Post (50) Pole or post (≤4 inches in diameter)					(77) Train				
					(78) Trailer, disconnected in transport					
	(51) Pole or post (>4 but ≤12 inches in diameter)					Other nor	fixed objec	t (specify):		
	•	(>12 inches	s in diameter)	)	•					
	Pole or post				(89) Unknown nonfixed object (98) Other event (specify):					
(54)	Concrete tra	ffic barrier								
	Impact atten									
	Other traffic		cify):		(99) Unknown event or object					
<del>, , , , , , , , , , , , , , , , , , , </del>										
		DEFO	RMATION CL	ASSIFICATIO	N BY	EVENT N	UMBER			
A 1						(4)	(5)			
Accident Event		(1) (2) Direction	Incremental	(3)		Specific ngitudinal	Specific Vertical or	(6)	(7)	
Sequence	Object	of Force	Value of	Deformation		ngitudinai or Lateral	Lateral	Type of Damage	(7) Deformation	
Number	Contacted	(degrees)	Shift	Location	<u> </u>	Location	Location	Distribution	Extent	

# 

 				***************************************		
 <u>:</u>	 ***************************************		<del></del>			
 	 			-	-	
 	 		-	<del></del>	<del></del>	
 		**********				
 	 				<del></del>	
 	 -					
	 	40		<u></u>		

National Accident Sampling System - Crashworthiness Data System. Exterior Vehicle Form Page										
COLLISION DEFORMATION CLASSIFICATION										
HIGHEST DELTA "V"										
Accident Event Sequence Number	Object Contacted	(1) (2) Direction of Force		(4) Specific Longitudinal or Lateral Location	(5) Specific Vertical or Lateral Location	(6) Type of Damage Distribution	(7) Deformation Extent			
4. <u>O</u> <u>l</u>	5. <u>0</u> 2	6. <u>L</u> <u>2</u>	7. <u>F</u>	8. <u>L</u>	9. <u>E</u>	10. <u>S</u>	11. 09			
Second Hig	hest Delta "\	<i>/''</i>								
12	13	14	_ 15	16	17	18	19			
			CRUS	SH PROFILE						
			e damage descri ate space below. <i>i</i>				nted			
20. L	21. 	<u></u>	2 <u>C3</u>	C4	C5	C6	22. + D			
122	_00	_0	<u> 03</u>	<u>03</u>	02	_02	€ 025			
Second Hi	ighest Delta '	'V''								
23. 24. 25. + L C1 C2 C3 C4 C5 C6 - D										
							+			
	s Documente Coded on The ed File		77. Researcher's A of Vehicle Disp (0) Not towed vehicle dar (1) Towed due vehicle dar (9) Unknown	oosition due to nage to	<u>97.6</u>	nal Wheelbase Code to the nearest tenth of an in Unknown				
			HE CDS APPL R 9), DO NOT C							



U.S. Department of Transportation


National Highway Traffic Safety

Administration

# **INTERIOR VEHICLE FORM**

NATIONAL ACCIDENT SAMPLING SYSTEM CRASHWORTHINESS DATA SYSTEM

Adn	ninistration	
		GLAZING
1.	Primary Sampling Unit Number	
,	Case Number Stretum 90-05	Glazing Damage from Impact Forces
2.	Case Number Stratum 10-05	15.WS 4 16. LF 4 17. RF 4 18. LR 4 19. RR 4.
3.	Vehicle Number 01	20. BL / 21. Roof / 22. Other /
	INTEGRITY	(0) No glazing damage from impact forces
100		(2) Glazing damage from impact forces
4.	Passenger Compartment Integrity O	(3) Glazing in place and holed from impact forces (4) Glazing out-of-place (cracked or not) and not holed from
7 ( ) ( ) ( ) ( ) ( ) ( )	(00) No integrity loss	impact forces
	Voc Integrity Wee Lost Through	(5) Glazing out-of-place and holed from impact forces
	Yes, Integrity Was Lost Through (01) Windshield	(6) Glazing disintegrated from impact forces (7) Glazing removed prior to accident
	(02) Door (side)	(8) No glazing
	(03) Door/hatch (rear)	(9) Unknown if damaged
	(04) Roof	Glazing Damage from Occupant Contact
l	(05) Roof glass (06) Side window	
l	(07) Rear window	23.W5 Q 24. LF Q 25. RF Q 28. LR Q 27. RR Q
	(08) Roof and roof glass	
	(09) Windshield and door (side)	28. BL <u>O</u> 29. Roof <u>O</u> 30. Other <u>O</u>
	(10) Windshield and roof (11) Side and rear window	(0) No occupant contact to glazing or no glazing
	(98) Other combination of above (specify):	(1) Glazing contacted by occupant but no glazing damage
	(	(2) Glazing in place and cracked by occupant contact
	(99) Unknown	(3) Glazing in place and holed by occupant contact (4) Glazing out-of-place (cracked or not) by occupant
,		contact and not holed by occupant contact
D	por, Tallgate Or Hatch Opening	(5) Glazing out-of-place by occupant contact
		and holed by occupant contact
5.	LES 6. REL 7. LR O B. RR O 9. TG/H L	(6) Glazing disintegrated by occupant contact (9) Unknown if contacted by occupant
	(0) No door/gate/hatch	
	(1) Door/gate/hatch remained closed and operational	If No Glazing Damage And No Occupant Contact or No
	(2) Door/gate/hatch came open during collision	Glazing, Then Code IV 31 Through IV 46 As 0
	(3) Door/gate/hatch jammed shut (8) Other (specify):	WATER CONTROL OF THE PROPERTY
	(9) Unknown	CAN TANK THE RESERVE OF THE STREET
		ENDER CASACTOR OF CONTRACTOR
	emage/Failure Associated with Boor Taligate or Hatch 🦠	(0) No glazing contact and no damage, or no glazing
	pening in Collision: #: N/053/929 # 2, Then Code 6.	(1) AS-1 — Laminated (2) AS-2 — Tempered
	NE PROPERTY PRINCE	(3) AS-3 — Tempered-tinted
		(4) AS-14 — Glass/Plastic
	(0) No door/gate/hatch or door not opened	(8) Other (specify):
	Door, Tailgate, or Hatch Came Open During Collision	(9) Unknown
	(1) Door operational (no damage)	
ĺ	(2) Latch/striker failure due to damage	
ŀ	(3) Hinge failure due to damage	
	(4) Door structure failure due to damage (5) Door support (i.e., pillar, sill, roof side rail,	
	etc.) failure due to damage	
	(6) Latch/striker and hinge failure due to	(0) No glazing contact and no damage, or no glazing
	damage (8) Other failure (specify):	(1) Fixed
	(o) Onio landia (spacity).	(2) Closed (3) Partially opened
	(9) Unknown	(4) Fully opened
		(9) Unknown
L		

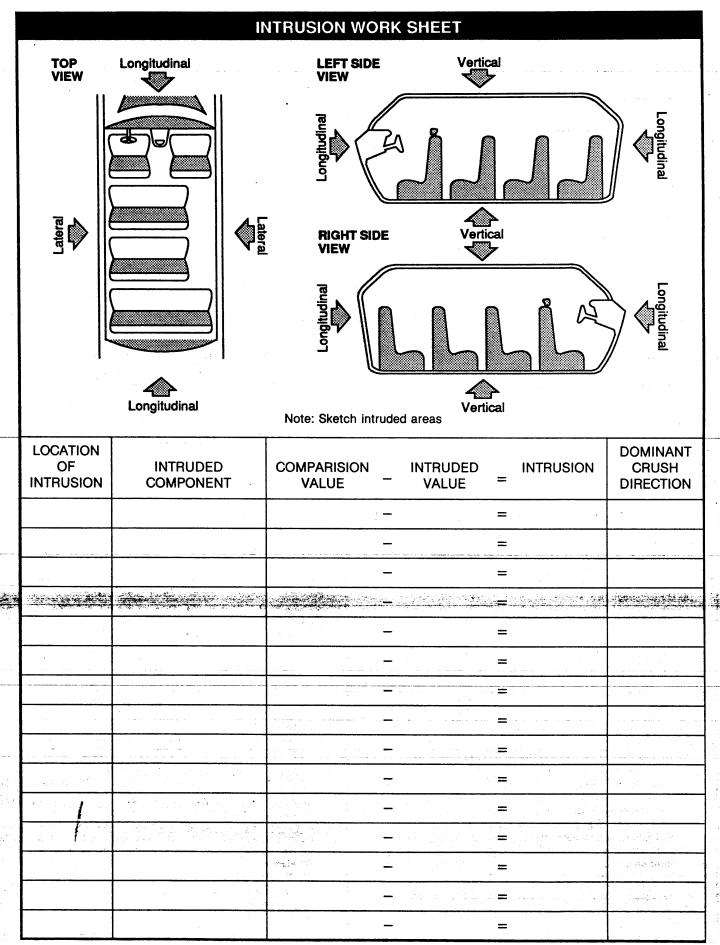

OCCUPANT ARE	EA INTRUSION
Note: If no intrusions, leave variables IV 47-IV 86 blank.	INTRUDING COMPONENT
t Dominant	Interior Components
Location of Intruding Magnitude Crush	(01) Steering assembly
Intrusion Component of Intrusion Direction	(02) Instrument panel left
	(03) Instrument panel center
1st 47	(04) Instrument panel right
Property (No. 1997)	(05) Toe pan
	(06) A-pillar
2nd 51 52 53 54	(07) B-pillar
	(08) C-pillar
.3rd 65. 66. 67. 58.	(09) D-pillar
e8rd 65. 56. 66. 67. 67. 68.	(10) Door panel
	(12) Roof (or convertible top)
4th 59 80 61 62	(13) Roof side rail
The second secon	(14) Windshield
Parker and Anthony and the Control of the Control o	(15) Windshield header
5th 83 84 65 66.	(16) Window frame
	(17) Floor pan
	(18) Backlight header
88. 69. 70.	(19) Front seat back
	(20) Second seat back
9th 91 72 73 74	(21) Third seat back
The state of the s	(22) Fourth seat back
And the later of the state of t	(23) Fifth seat back
8th ¥75 78 77 78	(24) Seat cushion
Control of the Contro	(25) Back panel or door surface
	(26) Other interior component (specify):
9th 39 81 82.	(20) Other interior component (specify).
The second secon	
ion 13 84 95 96	(27) Side panel - forward of the A-pillar
0th <b>33 84 85 86</b> ,	(28) Side panel - rear of the A-pillar
	Exterior Components
LOCATION OF INTRUSION	(30) Hood
LOCATION OF INTROSION	
Front Seat	(31) Outside surface of vehicle (specify):
(11) Left NO INTRUSION	(32) Other exterior object in the environment
(12) Middle	
(13) Right	(specify):
Second Seat	(33) Unknown exterior object
(21) Left	
(22) Middle	(98) Intrusion of unlisted component(s)
	(specify):
(23) Right	(99) Unknown
Third Seat	
(31) Left	MAGNITUDE OF INTRUSION
(32) Middle	$(1) \ge 1$ inch but $< 3$ inches
(33) Right	$(2) \ge 3$ inches but $< 6$ inches
Fourth Seat	$(3) \ge 6 \text{ inches but } < 12 \text{ inches}$
(41) Left	$(4) \ge 12$ inches but < 18 inches
(42) Middle	(4) = 12 inches but < 16 inches (5) ≥ 18 inches but < 24 inches
(43) Right	(6) ≥ 24 inches
(10) inRig	(9) Unknown
(98) Other enclosed area (specify):	(O) CHAIDWII
(00) other cholosed area (specify).	DOMINANT CRUSH DIRECTION
	/1) Vertical

(99) Unknown

(1) Vertical (2) Longitudinal (3) Lateral

(9) Unknown

# STEERING COLUMN WORKING DIAGRAMS

STEERING COLUMN COLLAPSE

Steering Column Shear Module Movement





SHEAR CAPSULE



Right \_\_\_\_\_ ''

Direction and Magnitude of Steering Column Movement



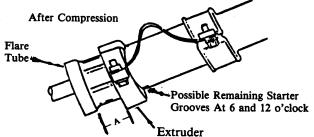

Compression = Measurement A


A =\_\_\_\_

#### STEERING COLUMN MOVEMENT


Vertical Movement

Lateral Movement

Longitudinal Movement







	COMPARISON VALUE _ DAMAGED VALUE = MOVEMENT
VERTICAL	
LATERAL	
LONGITUDINAL	

#### STEERING RIM/SPOKE DEFORMATION

COMPARISON VALUE - DAMAGED VALUE		DEFORMATION
	=	
	=	

# STEERING COLUMN 87. Steering Column Type (1) Fixed column (2) Tilt column (3) Telescoping column (4) Tilt and telescoping column (8) Other column type (specify): (9) Unknown If PDOF ≠ 11, 12 or 1, Then Code IV88-IV91 As 96 88. Steering Column Collapse Due to Occupant Loading Code actual measured movement to the nearest inch. See coding manual for measurement technique(s). (00) No movement, compression, or collapse (01-49) Actual measured value (50) 50 inches or greater Estimated movement from observation (81) Less than 1 inch $(82) \ge 1$ inch but < 2 inches $(83) \ge 2$ inches but < 4 inches $(84) \ge 4$ inches but < 6 inches $(85) \ge 6$ inches but < 8 inches (86) Greater than or equal to 8 inches (96) Not assessed (PDOF ≠ 11, 12, 1) (97) Apparent movement, value undetermined or cannot be measured or estimated (98) Nonspecified type column (99) Unknown Pirection:And Alac Column Movement 89. Vertical Movement 90. Lateral Movement 91.Longitudinal Movement 📗 🐇 Code the actual measured movement to the nearest inch. See Coding Manual for measurement technique(s) (+00) No Steering column movement (±01-±49) Actual measured value $(\pm 50)$ 50 inches or greater

Estimated movement from observation

(\_\_96) Not assessed (PDOF ≠ 11, 12, 1)

\_97) Apparent movement > 1 inch but cannot be measured or estimated

 $(\pm 81) \ge 1$  inch but < 3 inches


 $(\pm 84) \ge 12$  inches

(\_\_\_99) Unknown

 $(\pm 82) \ge 3$  inches but < 6 inches

 $(\pm 83) \ge 6$  inches but < 12 inches

92. Steering Rim/Spoke Deformation \_\_\_Code actual measured 🦠 🥕 deformation to the nearest Inch. (0) No steering rim deformation (1-5) Actual measured value (6) 6 inches or more (8) Observed deformation cannot be measured (9) Unknown 93. Location of Steering Rim/Spoke Deformation (00) No steering rim deformation Quarter Sections (01) Section A (02) Section B (03) Section C (04) Section D **Half Sections** (05) Upper half of rim/spoke (06) Lower half of rim/spoke Upper (07) Left half of rim/spoke Lower (08) Right half of rim/spoke (09) Complete steering wheel collapse (10) Undetermined location (99) Unknown **INSTRUMENT PANEL** 94. Odometer Reading 22892 miles - Code mileage to the nearest 1,000 miles (000) No odometer (001) Less than 1,500 miles (300) 299,500 miles or more (999) Unknown Source:\_ 95. Instrument Panel Damage from Occupant Contact (0) No (1) Yes (9) Unknown 96. Knee Bolsters Deformed from Occupant Contact (0) No (1) Yes (8) Not present (9) Unknown 97. Did Glove Compartment Door Open During Collision(s) (0) No (1) Yes (8) Not present (9) Unknown

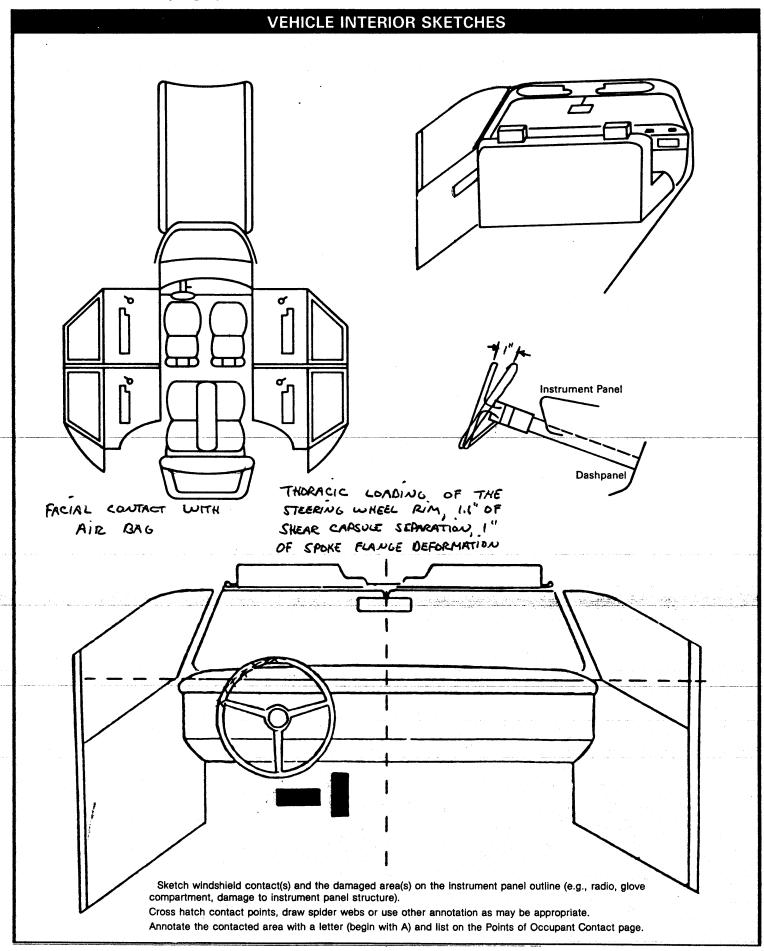

POINTS OF OCCUPANT CONTACT							
Contact	Interior Component Contacted	Occupant No. If Known	Body Region If Known	Supportin	ng Physical Evidence	Confidence Level of Contact Point	
Α	A 45 1		CHEST	•	•	1	
В	04	1	CHEST		ABRASIONS DEFORMATION		
С			- CNC 31	TENERE D	DEPORMATION	<u>'</u>	
D							
E							
F							
G							
Н							
ı			· · · · · · · · · · · · · · · · · · ·				
J	•					1	
K						1	
L.							
M							
N							
		CODE	S EOD INITEDIO	P COMPONENTS			
(11) Right instrument panel and below (12) Glove compartment door (13) Knee bolster (14) Windshield including one or more of the following: front header, A- pillar, instrument panel, mirror,or steering assembly (driver side only) (15) Windshield including one or more of the following: front header, A- pillar, instrument panel, or mirror (passenger side only) (16) Other front object (specify):		(27) In of RIGHT Ion (30) Inent Is, tape (31) (32) Iselow (33) Iselow (34) Iselow (35) Ir more (36) Ir more (36) Ir more (37) Ir more (37) INTERIC (40) (41) (42)	(26) Left side window glass including one or more of the following: frame, window sill, A-pillar, B-pillar, or roof side rail (27) Other left side object (specify):  RIGHT SIDE (30) Right side interior surface, excluding hardware or armrests (31) Right side hardware or armrest (32) Right A pillar (33) Right B pillar (34) Other right pillar (specify):  (35) Right side window glass or frame (36) Right side window glass including one or more of the following: frame, window sill, A-pillar, B-pillar, or roof side rail (37) Other right side object (specify):  INTERIOR (40) Seat, back support (41) Belt restraint webbing/buckle (42) Belt restraint B-pillar attachment		(53) Roof right side rail (54) Roof or convertible top		
(20) Left side hardward (21) Left side (22) Left A pi (23) Left B pi		est (44) (45)	point Other restraint s (specify): Head restraint sy Air cushion Other occupants		CONFIDENCE LEV CONTACT PO  (1) Certain (2) Probable (3) Possible		
(25) Left side	window glass or fi		Interior loose ob	jects	(4) Unknown	· · · · · · · · · · · · · · · · · · ·	

Δ	R	.U	M	ΙΔ	67	C	$\mathbf{R}$	ES	1	RΔ	IIN	JTS	3
_													

NOTES: Encode the data for each applicable front seat position. The attributes for the variables may be found below. Restraint systems should be assessed during the vehicle inspection then coded on the Occupant Assessment Form.

, '		Left	Center	Right
F	Availability			·
Ŕ	Function	4		
5 T	Failure			

Automatic (Passive) Restraint System Availability	<b>Automatic (Passive) Restraint Function</b>
---	---

- (0) Not equipped/not available
- (1) Airbag
- (2) Airbag disconnected (specify):
- (3) Airbag not reinstalled
- (4) 2 point automatic belts
- (5) 3 point automatic belts
- (6) Automatic belts destroyed or rendered inoperative
- (9) Unknown

(0) Not equipped/not available

**Automatic Belt** 

- (1) Automatic belt in use
- (2) Automatic belt not in use
- (3) Automatic belt use unknown

Air Bag

- (4) Airbag deployed during accident
- (5) Airbag deployed inadvertently just prior to accident
- (6) Deployed, accident sequence undetermined
- (7) Nondeployed
- (8) Unknown if deployed
- (9) Unknown

### **Did Automatic (Passive) Restraint Fail**

- (0) Not equipped/not available
- (1) No
- (2) Yes (specify): .
- (9) Unknown

## MANUAL RESTRAINTS

NOTES: Encode the applicable data for each seat position in the vehicle. The attributes for the variables may be found below. Restraint systems should be assessed during the vehicle inspection then coded on the Occupant Assessment Form.

If a child safety seat is present, encode the data on the back of this page.

If the vehicle has automatic restraints available, encode the appropriate data on the back of the previous page.

		Left	Center	Right
F	Availability	4	-	4
R S T	Use	04	-	-
S T	Failure Modes		-	-
ОZООШО	Availability	3		3
CO	Use	-	-	_
D D	Failure Modes	· _	-	-
T	Availability			
1	Use			
R D	Failure Modes			
٠ ک	Availability			
-HER	Use			
R	Failure Modes			

Manual	(Active)	<b>Belt System</b>	<b>Availability</b>
I TI GUILGUI	MOUTE	Deir Otarelli	Avanavinta

- (0) Not available
- (1) Belt removed/destroyed
- (2) Shoulder belt
- (3) Lap belt
- (4) Lap and shoulder belt
- (5) Belt available type unknown
- (8) Other belt (specify):
- (9) Unknown

## Manual (Active) Belt System Use

- (00) None used, not available, or belt removed/destroyed
- (01) Inoperative (specify):
- (02) Shoulder belt
- (03) Lap belt
- (04) Lap and shoulder belt
- (05) Belt used type unknown

- (08) Other belt used (specify):
- (12) Shoulder belt used with child safety seat
- (13) Lap belt used with child safety seat
- (14) Lap and shoulder belt used with child safety seat
- (15) Belt used with child safety seat type unknown
- (18) Other belt used with child safety seat (specify):
- (99) Unknown if belt used


## Manual (Active) Belt Failure Modes During Accident

- (0) No manual belt used or not available
- (1) No manual belt failure(s)
- (2) Manual belt failure(s) (encode all that apply above)
- [A] Torn webbing (stretched webbing not included)
- [B] Broken buckle or latchplate
- [C] Upper anchorage separated
- [D] Other achorage separated (specify):
- [E] Broken retractor
- [F] Other manual belt failure (specify):
- (9) Unknown

4-44-6

	CAFETY	CEAT FIELD	ACCECCAMENT
Uffillu	SAFELY	SEAT FIELD	ASSESSMENT

When a child safety seat is present enter the occupant's number in the first row and complete the column below the occupant's number using the codes listed below. Complete a column for each child safety seat present.

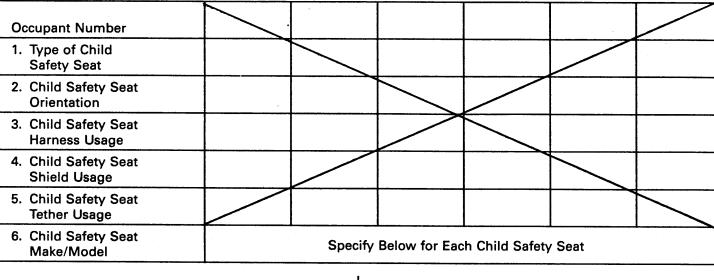

- 1. Type of Child Safety Seat
  - (0) No child safety seat
  - (1) Infant seat
  - (2) Toddler seat
  - (3) Convertible seat
  - (4) Booster seat
  - (7) Other type child safety seat (specify):
  - (8) Unknown child safety seat type
  - (9) Unknown if child safety seat used
- 2. Child Safety Seat Orientation
  - (00) No child safety seat

Designed for Rear Facing for This Age/Weight

- (01) Rear facing
- (02) Forward facing
- (03) Other orientation (specify):
- (04) Unknown orientation

Designed for Forward Facing for This Age/Weight

- (11) Rear facing
- (12) Forward facing
- (18) Other orientation (specify):
- (19) Unknown orientation

Unknown Design or Orientation for This Age/ Weight, or Unknown Age/Weight

- (21) Rear facing
- (22) Forward facing
- (28) Other orientation (specify):
- (29) Unknown orientation
- (99) Unknown if child safety seat used

- 3. Child Safety Seat Harness Usage
- 4. Child Safety Seat Shield Usage
- 5. Child Safety Seat Tether Usage

Note: Options Below Are Used for Variables 3-5.

(00) No child safety seat

Not Designed with Harness/Shield/Tether

- (01) After market harness/shield/tether added, not used
- (02) After market harness/shield/tether used
- (03) Child safety seat used, but no after market harness/shield/tether added
- (09) Unknown if harness/shield/tether added or used

Designed with Harness/Shield/Tether

- (11) Harness/shield/tether not used
- (12) Harness/shield/tether used
- (19) Unknown if harness/shield/tether used

Unknown if Designed with Harness/Shield/Tether

- (21) Harness/shield/tether not used
- (22) Harness/shield/tether used
- (29) Unknown if harness/shield/tether used
- (99) Unknown if child safety seat used
- 6. Child Safety Seat Make/Model
  (Specify make/model and occupant number)

## **HEAD RESTRAINTS/SEAT EVALUATION**

NOTES:	Encode the applicable data for each seat position in the vehicle. The attributes for these variables may
	be found at the bottom of the page. Head restraint type/damage and seat type/performance should be
	assessed during the vehicle inspection then coded on the Occupant Assessment Form.

		Left	Center	Right
F	Head Restraint Type/Damage	3		3
Ŕ	Seat Type	01	-	02
S T	Seat Performance	(		1
OZOOmw	Head Restraint Type/Damage	0	_	0
o O	Seat Type	02	_	02
N D	Seat Performance	(	_	1
T H	Head Restraint Type/Damage			
1	Seat Type			
R D	Seat Performance			
O T H	Head Restraint Type/Damage			
	Seat Type			
E R	Seat Performance			

Occupant Position		erformance (This Occupant Position)
	(0)	No seat
(0) No head restraints	(1)	No seat performance failure(s)
(1) Integral — no damage		
(2) Integral — damaged during accident	(2)	Seat performance failure(s)
(3) Adjustable – no damage		(Encode all that apply)
(4) Adjustable — damaged during accident		FAT Cond addition of fathers
(5) Add-on – no damage		[A] Seat adjusters failed
(6) Add-on — damaged during accident		[B] Seat back folding locks failed
(8) Other (specify):		[C] Seat tracks failed
(O) University		[D] Seat anchors failed
(9) Unknown	en errorandere e grande	[E] Deformed by impact of passenger from rear
Seat Type (This Occupant Position)		[F] Deformed by impact of passenger from front
Seat Type (This Occupant Position)		[G] Deformed by own inertial forces
(00) No seat		[H] Deformed by passenger compartment intrusion
(01) Bucket		(specify):
(02) Bucket with folding back		
(03) Bench		
(04) Bench with separate back cushions		
(05) Bench with folding back(s)		
(06) Split bench with separate back cushions		
(07) Split bench with folding back(s)		
(08) Pedestal (i.e., van type)		[I] Other (specify):
		[i] Callot (Specify).
(09) Other seat type (specify):		
(99) Unknown	(9)	Unknown
	,-,	
DESCRIBE ANY INDICATION OF ABNORMAL OCCUPA	NT POS	TURE (I.E. UNUSUAL OCCUPANT
CONTACT PATTERN)		

	EJECTION	/ENTRAP	MENT DAT	Д	•		
Complete the following if the research					ner ejected f	rom or entra	appe
in the vehicle. Code the appropriate		Occupant /	Assessment Fo	orm.			
Describe indications of ejection and	TALL THE COLUMN TALL THE COLUM	involved in	partial ejectio	n(s):			
							<del></del>
							]
Occupant Number							
Ejection							
			·				1
Ejection Area							
Ejection Medium						get sacramentalentere etamonateri manaterialente barrinateria anti	era III samuninanan serae n
							1.
Medium Status							
	T						
(1) Complete ejection	(7) Roo (8) Oth		e.g., back of		ntegral stru Other mediu	cture um (specify)	):
(2) Partial ejection (3) Ejection, unknown degree	pick	kup, etc.) (s	specify):	anga atau			
(9) Unknown	(9) Unk	nown	er i samuel i se e e e e e e e e e e e e e e e e e	(9)	Jnknown	فرجها البياطات فيراهيك بعاد يعاقد	
Ejection Area (1) Windshield	Ejection M	ledium		Mediu to Imp		mmediately	Prio
(2) Left front	(1) Doo	r/hatch/tail fixed roof	gate	(1)	Open		
(3) Right front (4) Left rear	(3) Fixe	d glazing		(2) (	Closed ntegral stru	cture	
(5) Right rear (6) Rear	(4) Non	fixed glazir	ng (specify):		Jnknown		
				<u> </u>	-		
	4.						
Describe entrapment mechanism:							
	· · · · · · · · · · · · · · · · · · ·			<u> </u>			
					·		
Component(s):			<u> </u>				

(Note in vehicle interior diagram)

## APPENDIX D

NASS Occupant Forms

U.S. Department of Transportation National Highway Traffic Safety Administration Form Approved
O.M.B. No. 2127-0021
NATIONAL ACCIDENT SAMPLING SYSTEM
CRASHWORTHINESS DATA SYSTEM

## **OCCUPANT ASSESSMENT FORM**

1. P <del>rimary Sampling Unit Numbe</del> r	11. Occupant's Posture (0) Normal posture
2. Case Number Stratum 90-05	(1) Abnormal posture (specify):
3. Vehicle Number	(9) Unknown
4. Occupant Number	EJECTION/ENTRAPMENT
OCCUPANT'S CHARACTERISTICS	12. Ejection
5. Occupant's Age Code actual age at time of accident. (00) Less than one year old (specify by month):	(0) No ejection (1) Complete ejection (2) Partial ejection (3) Ejection, unknown degree (9) Unknown
(97) 97 years and older (99) Unknown  6. Occupant's Sex (1) Male (2) Female (9) Unknown  7. Occupant's Height Code actual height to the nearest inch. (99) Unknown  8. Occupant's Weight Code actual weight to the nearest pound. (999) Unknown  9. Occupant's Role (1) Driver (2) Passenger	13. Ejection Area  (0) No ejection (1) Windshield (2) Left front (3) Right front (4) Left rear (5) Right rear (6) Rear (7) Roof (8) Other area (e.g., back of pickup, etc.) (specify): (9) Unknown  14. Ejection Medium (0) No ejection (1) Door/hatch/tailgate (2) Nonfixed roof structure (3) Fixed glazing
(9) Unknown  10. Occupant's Seat Position  Front Seat (11) Left side (12) Middle (13) Right side (14) Other (specify):  Second Seat (21) Left side (22) Middle (23) Right side (24) Other (specify):  Third Seat (31) Left side (32) Middle (33) Right side (34) Other (specify):  Fourth Seat (41) Left side (42) Middle (43) Right side (44) Middle (43) Right side (44) Other (specify):  (97) In or on unenclosed area (98) Other seat (specify):	(4) Nonfixed glazing (specify):  (5) Integral structure (8) Other medium (specify):  (9) Unknown  15. Medium Status (Immediately Prior to Impact) (0) No ejection (1) Open (2) Closed (3) Integral structure (9) Unknown  16. Entrapment (NOTE: Entrapped means that part of the person was in the vehicle and mechanically restrained; jammed doors and immobilizing injuries by themselves are not sufficient to constitute entrapment.) (0) Not entrapped (1) Entrapped (9) Unknown
(99) Unknown	54

# 1 Seat anchors failed [ ] Deformed by impact of passenger from rear [ ] Deformed by impact of passenger from front ] Deformed by own inertial forces Deformed by passenger compartment intrusion (specify): [ ] Other (specify):

## **CHILD SAFETY SEAT**

000 28. Child Safety Seat Make/Model (000) No child safety seat Applicable codes are found in your NASS CDS Data Collection, Coding, and Editing Manual (997) Other make/model (specify): (998) Unknown make/model (999) Unknown if child safety seat used

- 29. Type of Child Safety Seat
  - (0) No child safety seat
  - (1) Infant seat

(9) Unknown

- (2) Toddler seat
- (3) Convertible seat
- (4) Booster seat
- (7) Other type child safety seat (specify):
- (8) Unknown child safety seat type
- (9) Unknown if child safety seat used

	Designed for Rear Facing for This Age/Weight (01) Rear facing (02) Forward facing
	(08) Other orientation (specify):
	(09) Unknown orientation
	Designed for Forward Facing for This Age/Weig (11) Rear facing
	<ul><li>(12) Forward facing</li><li>(18) Other orientation (specify):</li></ul>
	(19) Unknown orientation
	Unknown Design or Orientation for This Age/Weight, or Unknown Age/Weight
	<ul><li>(21) Rear facing</li><li>(22) Forward facing</li></ul>
	(28) Other orientation (specify):
	(29) Unknown orientation
	(99) Unknown if child safety seat used
31.	Child Safety Seat Harness Usage
32.	Child Safety Seat Shield Usage
33.	Child Safety Seat Tether Usage  Note: Options below applicable to  Variables 0431-0433

# (00) No child safety seat

Not Designed with Harness/Shield/Tether

- (01) After market harness/shield/tether added, not used
- (02) After market harness/shield/tether used
- (03) Child safety seat used, but no after market harness/shield/tether added
- (09) Unknown if harness/shield/tether added or used

Designed with Harness/Shield/Tether

- (11) Harness/shield/tether not used
- (12) Harness/shield/tether used
- (19) Unknown if harness/shield/tether used

Unknown If Designed with Harness/Shield/Tether

- (21) Harness/shield/tether not used
- (22) Harness/shield/tether used
- (29) Unknown if harness/shield/tether used
- (99) Unknown if child safety seat used

National Highway Traffic Safety Administration

## **OCCUPANT INJURY FORM**

Form Approved
O.M.B. No. 2127-0021
NATIONAL ACCIDENT SAMPLING SYSTEM
CRASHWORTHINESS DATA SYSTEM

1. P<del>rimary Sampling Unit Number</del>
2. Case Number—Stratum
2. Case Number—Stratum
3. Vehicle Number
4. Occupant Number
01


## **INJURY DATA**

Record below the actual injuries sustained by this occupant that were identified from the official and unofficial data sources. Remember not to double count an injury just because it was identified from two different sources. If greater than ten injuries have been documented, encode the balance on the Occupant Injury Supplement.

	0	O.I.C.—A.I.S.					Injury	<b>5</b>		
	Source of Injury Data	Body Region	Aspect	Lesion	System Organ	A.I.S. Severity	Injury Source	Source Confidence Level	Direct/ Indirect Injury	Occupant Area Intrusion No.
1st	5. <u>3</u>	6. <b>E</b>	7江	8. <b>A</b> .	9.1	10.L	11. <u>45</u>	12. <u>l</u>	13. <u>l</u>	14. <u>QQ</u>
2nd	15. <u>3</u>	16. <b>E</b>	17. <u>L</u>	18, <u>/</u> A	19. <b>I</b>	20. 1	21.45	22. <u> </u>	23. 📐	24. <u>0</u> <u>0</u>
3rd	25	26	27	28	29	30	31	32	33	34
4th	35	36	37	28	39	40	41	42	43	44
5th	45	46. <u> </u>	47	48	49. <u> </u>	50, <u> </u>	51	52. <u> </u>	53. <u> </u>	54
6th	55	56. <u> </u>	57	58. <u> </u>	59	60. <u> </u>	61	62	63	64
7th	65. <u> </u>	66,	67	68	69	70	71	72	73	74
8th	, 75. <u> </u>	76. <sub>—</sub>	77	78	79	80	81,	82	83	84
9th	85	86	87	88	89	90	91	92	93	94
10th	95,	96	97	98	99	100	101	102	103	104

HS Form 433B (Rev. 1/90)

This report is authorized by P.L. 89-563, Title 1, Section 106, 108, and 112. While you are not required to respond, your cooperation is needed to make the results of this data collection effort comprehensive, accurate, and timely.

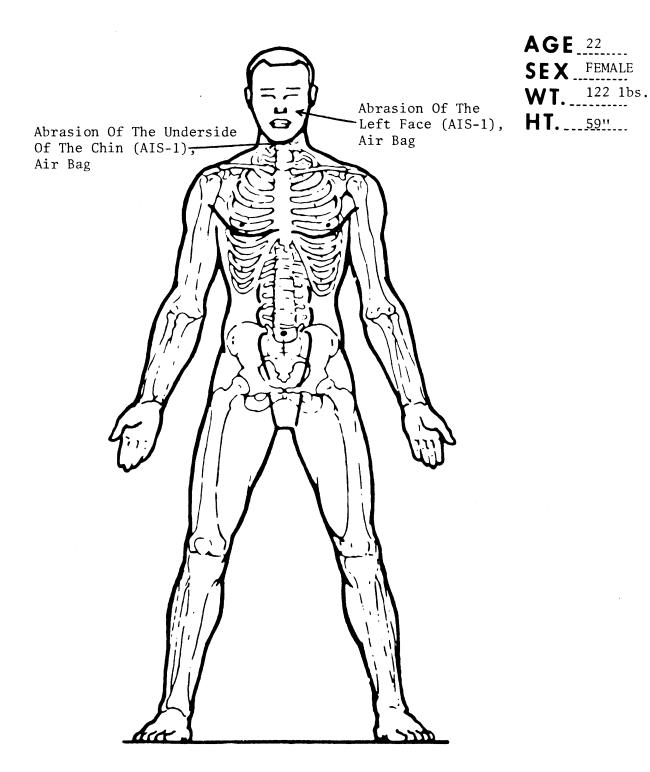

#### SOURCE OF INJURY DATA

#### **OFFICIAL**

- (1) Autopsy records with or without hospital medical records
- (2) Hospital medical records other than emergency room (eg. discharge summary)
- (3) Emergency room records only (including associated Xrays or other lab reports)
- (4) Private physician, walk-in or emergency clinic

#### UNOFFICIAL

- (5) Lay coroner report
- (6) E.M.S. personnel
- (7) Interviewee
- (8) Other source (specify):
- (9) Police

#### **INJURY SOURCE**

- (01) Windshield
- (02) Mirror
- (03) Sunvisor
- (04) Steering wheel rim
- (05) Steering wheel hub/spoke
- (06) Steering wheel (combination of codes 04 and 05)
- (07) Steering column, transmission selector lever, other attachment
- Add-on equipment (e.g., CB, tape deck, air conditioner)
- (09) Left instrument panel and below
- (10) Center instrument panel and below
- (11) Right instrument panel and below
- (12) Glove compartment door
- (13) Knee bolster
- (14) Windshield including one or more of the following: front header, A-pillar, instrument panel, mirror, or steering assembly (driver side only)
- (15) Windshield including one or more of the following: front header, A-pillar, instrument panel, or mirror (passenger side only)
- (16) Other front object (specify):

#### LEFT SIDE

- (20) Left side interior surface, excluding hardware or armrests
- (21) Left side hardware or armrest
- (22) Left A pillar
- (23) Left B pillar
- (24) Other left pillar (specify):
- (25) Left side window glass or frame

- (26) Left side window glass including one or more of the following: frame, window sill, A-pillar, B-pillar, or roof side rail
- (27) Other left side object (specify):

#### RIGHT SIDE

- (30) Right side interior surface, excluding hardware or armrests
- (31) Right side hardware or armrest
- (32) Right A pillar
- (33) Right B pillar
- (34) Other right pillar (specify):
- (35) Right side window glass or frame
- (36) Right side window glass including one or more of the following: frame, window sill, A-pillar, B-pillar, roof side
- (37) Other right side object (specify):

#### INTERIOR

- (40) Seat, back support
- (41) Belt restraint webbing/buckle(42) Belt restraint B-pillar attachment point
- (43) Other restraint system component (specify):
- (44) Head restraint system
- (45) Air bag
- (46) Other occupants (specify):
- (47) Interior loose objects
- (48) Child safety seat (specify):
- (49) Other interior object (specify):

#### ROOF

- (50) Front header
- (51) Rear header
- (52) Roof left side rail
- (53) Roof right side rail
- (54) Roof or convertible top

- (56) Floor including toe pan
- (57) Floor or console mounted transmission lever, including console
- Parking brake handle
- (59) Foot controls including parking brake

- (60) Backlight (rear window)
- (61) Backlight storage rack, door, etc.
- (62) Other rear object (specify):

#### EXTERIOR OF OCCUPANT'S VEHICLE

- (65) Hood
- (66) Outside hardware (e.g., outside mirror, antenna)
- (67) Other exterior surface or tires (specify):
- (68) Unknown exterior objects

#### EXTERIOR OF OTHER MOTOR VEHICLE

- (70) Front bumper
- (71) Hood edge
- (72) Other front of vehicle (specify):
- (74) Hood ornament
- (75) Windshield, roof rail, A-pillar
- (76) Side surface
- (77) Side mirrors
- (78) Other side protrusions (specify):
- (79) Rear surface
- (80) Undercarriage
- (81) Tires and wheels
- (82) Other exterior of other motor vehicle (specify):
- (83) Unknown exterior of other motor vehicle

## OTHER VEHICLE OR OBJECT IN THE ENVIRONMENT

- (85) Other vehicle or object (specify)
- (86) Unknown vehicle or object

#### NONCONTACT INJURY

- (90) Fire in vehicle
- (91) Flying glass
- (92) Other noncontact injury source (specify)
- (97) Injured, unknown source

### INJURY SOURCE CONFIDENCE **LEVEL**

- (1) Certain
- (2) Probable
- (3) Possible
- (9) Unknown

### **DIRECT/INDIRECT INJURY**

- (1) Direct contact injury
- (2) Indirect contact injury
- (3) Noncontact injury (7) Injured, unknown source

### OCCUPANT INJURY CLASSIFICATION

#### O.I.C. Body Region

- Abdomen Ankle - foot
- Arm (upper)
- Back-thoracolumbar spine
- Chest
- (C) Elbow
- (F) Face
- (R) Forearm
- Head skull Injured, unknown region (U)
- (K) Knee
- Leg (lower) (L) Lower limb(s) (whole or unknown
- part) Neck-cervical spine (N)
- (P) Pelvic - hip
- Shoulder (S) (T)Thiah
- (X) Upper limb(s) (whole or unknown
- (O) Whole body

(W) Wrist - hand

#### Aspect of Injury

- Anterior front
- Bilateral (rib fracture only).
- (C) Central
- Inferior lower Injured, unknown aspect
- (U) Left
- Posterior back
- (R) Right
- Superior upper (S) Whole region

## Lesion

- Abrasion
- (M) Amputation
- Avulsion (V) (B) Burn
- (K) Concussion (C) Contusion (N) Crush

- Detachment, separation
- (D) Dislocation
- Fracture

- Rupture
- (T) Strain

System/Organ

- (A) Arteries - veins
- Brain (B) (D) Digestive
- (E)
- (H)Heart

- Fracture and dislocation
- Injured, unknown lesion Laceration
- Perforation, puncture
- Sprain
- Total severance, transection
- (W) All systems in region
- Ears (O)Eve

Injured, unknown system

- Integumentary
- (J) **Joints**
- (K) Kidnevs
- (L) Liver (M) Muscles
- Nervous system (N)
- Pulmonary lungs (R) Respiratory
- (S) Skeletal
- (C) Spinal cord (Q) Spleen
- (T)Thyroid, other endocrine gland
- Urogenital Vertebrae

## **Abbreviated Injury Scale**

- Minor injury Moderate injury
- (2)(3) Serious injury
- (4)Severe injury (5) Critical injury
- (6) Maximum (untreatable) Injured, unknown severity

# AIRBAG ACCIDENT LEVEL FORM

(Leave Unknowns Blank)

Log Number C A 9 0 - 0 5
Accident State _ NJ NEW JERSEY
Accident Date
Month (January = 01, February = 02, etc.)
Day of Month
Year 9 0
Investigating Team 05 CALSPAN
Fleet Vehicle 6 1 - 73' Chev, Volvo, or 72' Merc,  2 - No., 3 - Insurance Fleet,  4 - GSA Fleet , 5 - Police Fleet,  6 - Other Corporate PRIVATE fleet)
Did Airbag car require towing / (1 = yes; 2 = no)
Did airbag deploy? _/ (1 = yes; 2 = no: 3 = inadvertent)
More YR-Vehicle Make 89 07 0 15 (NASS Make/Model Code 89 DOCGE DAYTONA
CDC 1 1 2 F L E S 9 1 Y/N  (rank by 2
Highest AIS in Airbag car 1
Delta-V of principal damage to Airbag car Sineswife (Deployment Event)
Object struck by Airbag car 1983 TOYOTA COROLLA 01
Driver age in Airbag car $022$
Number of front seat occupants in Airbag car
Number of belted front seat occupants in Airbag car
Type of Investigation S (R=Remote; S)= On-Site)

## AIRBAG PERSON LEVEL FORM

(Complete one form for each person in Airbag car)

	Log Number CA 9	0 - 0	5								
	Occupant Number O	-	ssigned by our; 01, 02, osition)	coder forbased o	each Airbag n seat						
	Occupant's age in years	02	2								
	Seating position		left center 1	irst pers	on in cente	r					
		4	center 2 right	.s 2							
In which seat was the occupant? (1 = front, 2 = back)											
Was the occupant wearing a belt restraint? (1 = yes, 2 = no											
	Was the occupant kille	ed? <u>l</u>	(1 = Not killed,		2 = killed)						
S .	oic	INJURY SOURCE	DIRECT/ INDIRECT	SOURCE OF DATA							
	1 F I A I I	45		07	(Use NASS Coding)	88					
-	2 <u>F L A I I</u> 3			_07							
_	4				٠.						
•	5										
	7										
	9				•						
_	10			•							
	11	· —			• _						

<sup>(</sup>if no injuries, enter 0 for first AIS and leave the rest of the OIC's blank)